


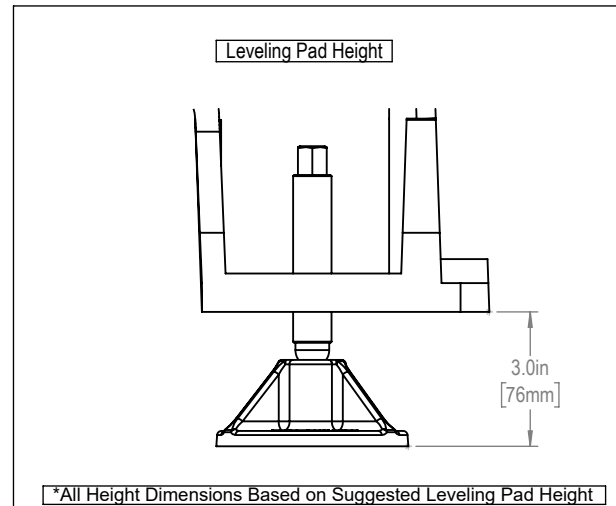
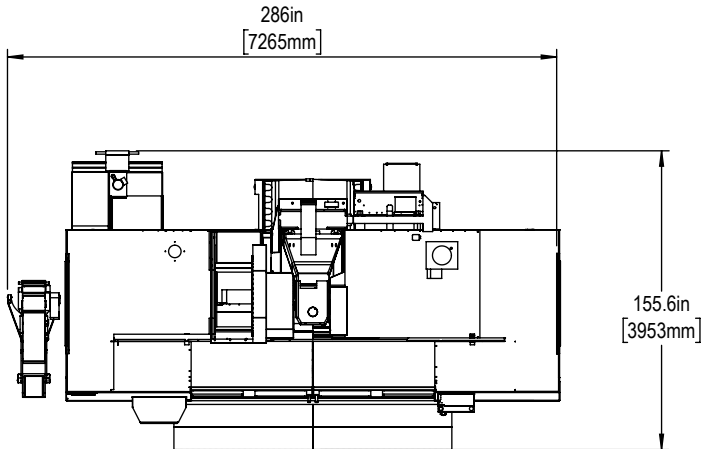
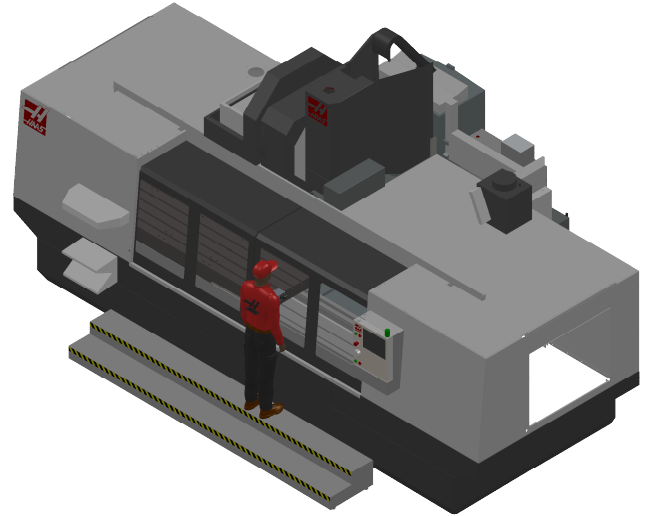


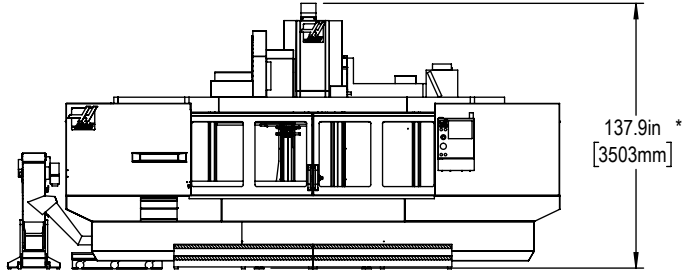


Installed Dimensions

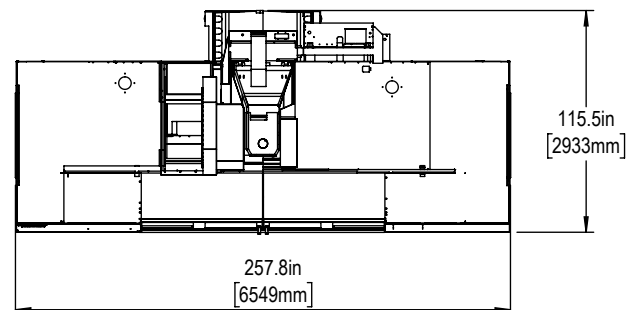

Shipping Dimensions

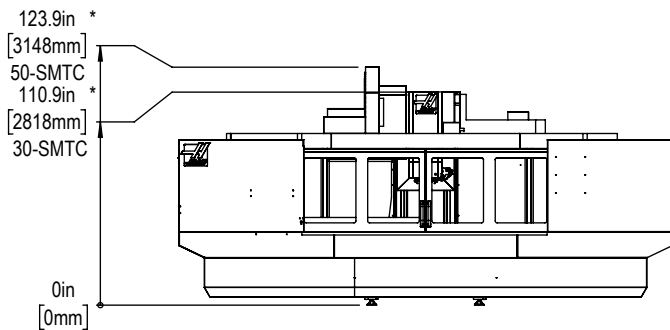

Air & Power

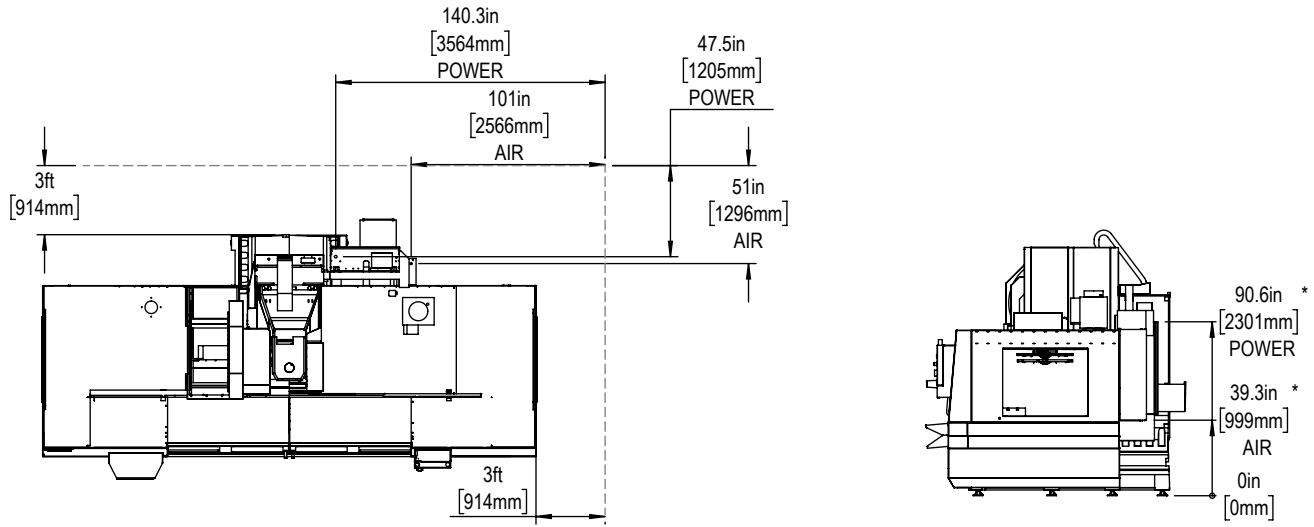

Maintain 3 feet [915mm] clearance to the nearest obstruction around all sides of machine perimeter for maintenance access


Note:
Machine must be placed on one continous concrete slab. Slab should extend 12in [305mm] beyond anchor holes in all directions

Anchor Pattern

For machines built before Oct. 2023


Anchor Hole Detail
 \varnothing 5/8in[15.8mm]
 ∇ 2.0in[51mm]-
 ∇ 2.25in[57mm]

NOTE: For machines built after Oct. 2023, see separate Anchoring Template.

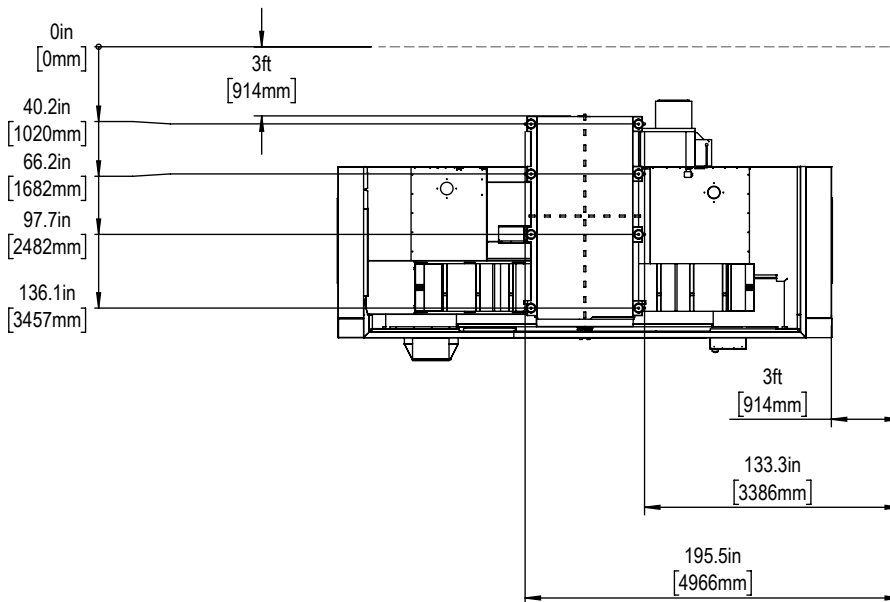


For precise locations and specifications please use template in Anchoring Kit found at Haascnc.com

Height Breakdown

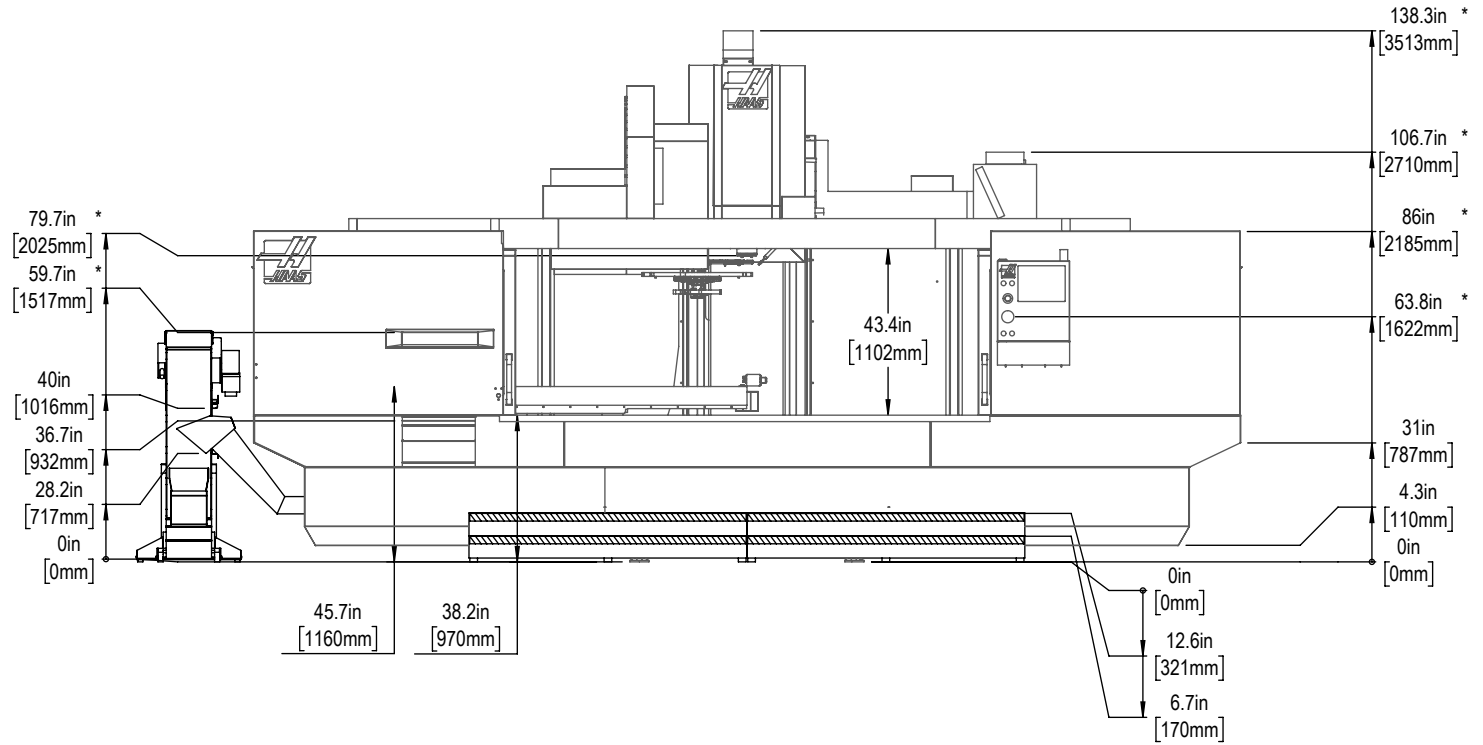


Width Breakdown

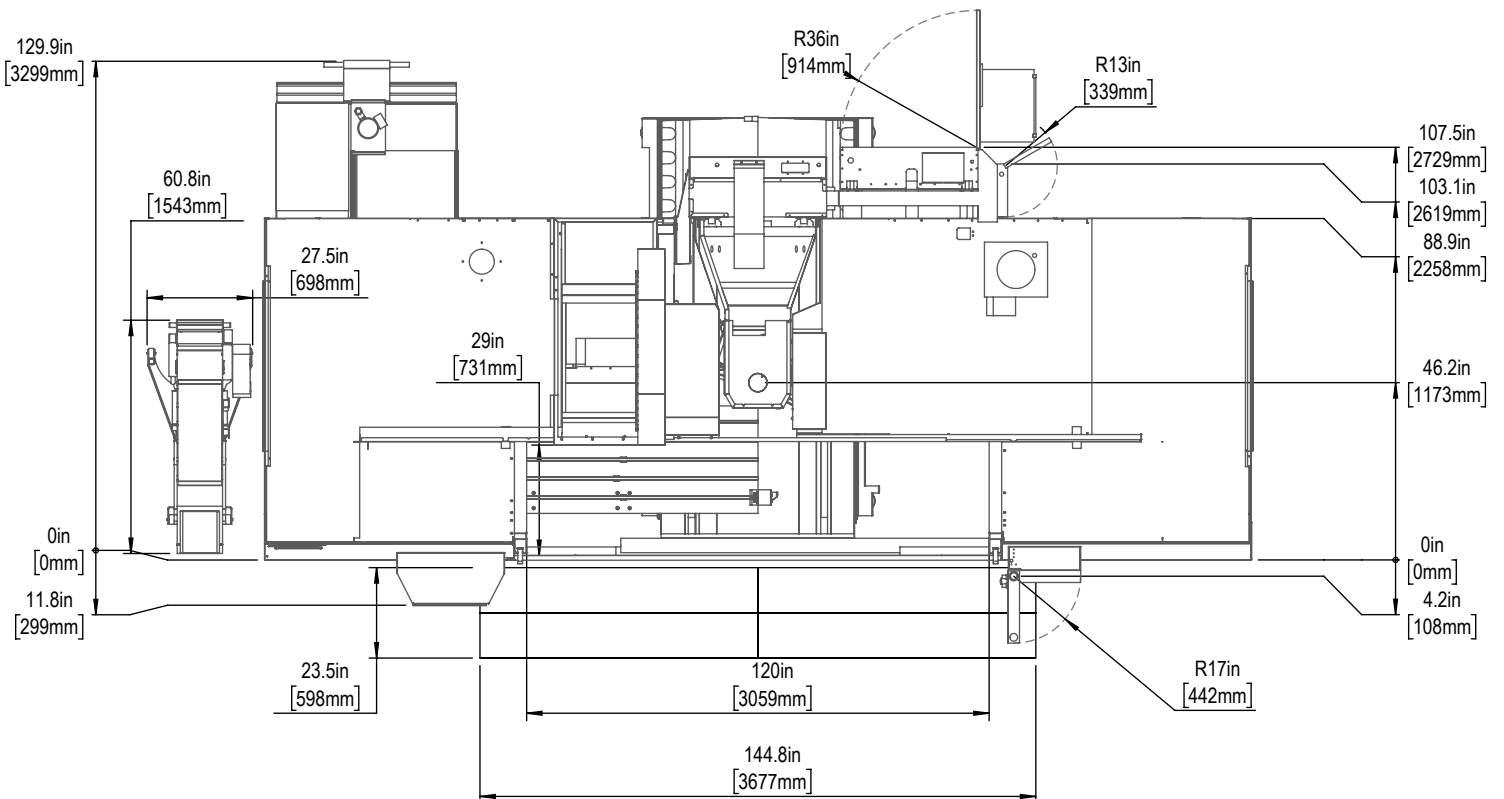





X&Y-Axis Travel and Clearance

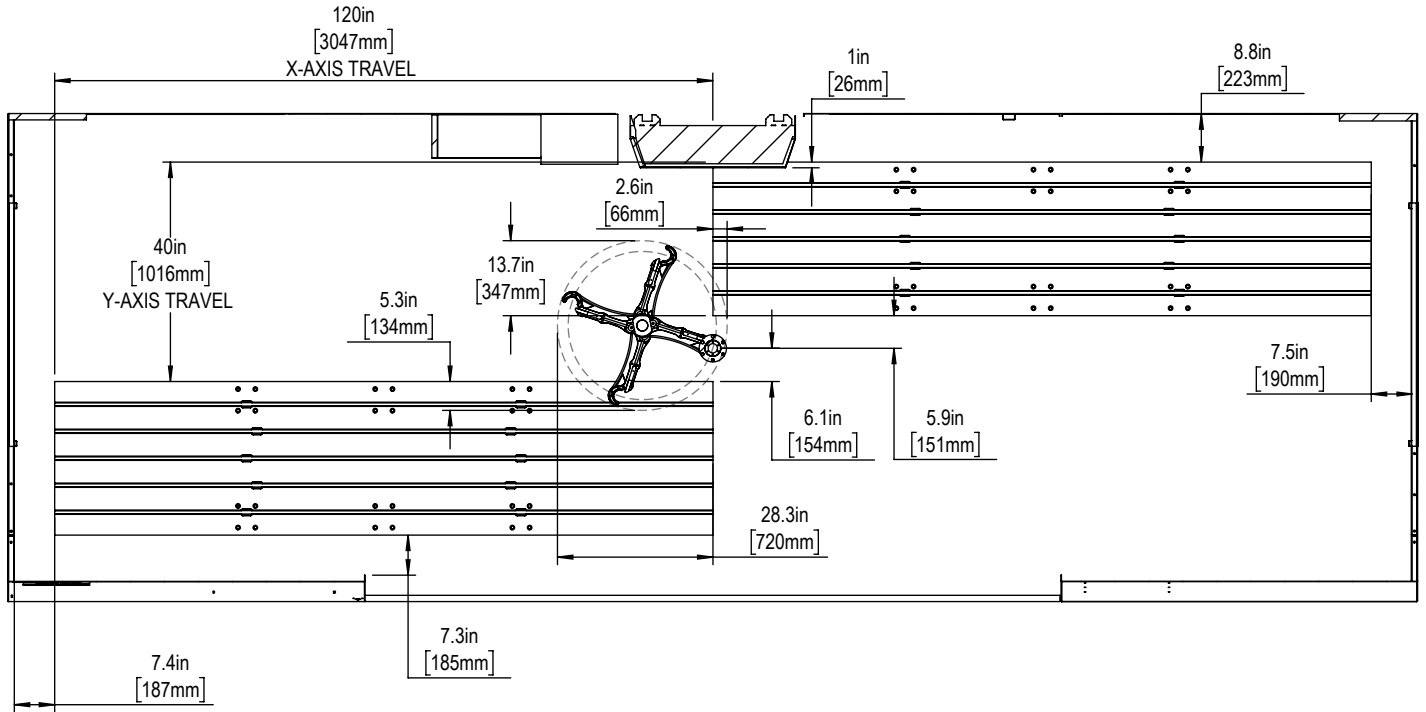


Z-AXIS TRAVEL & CLEARANCE

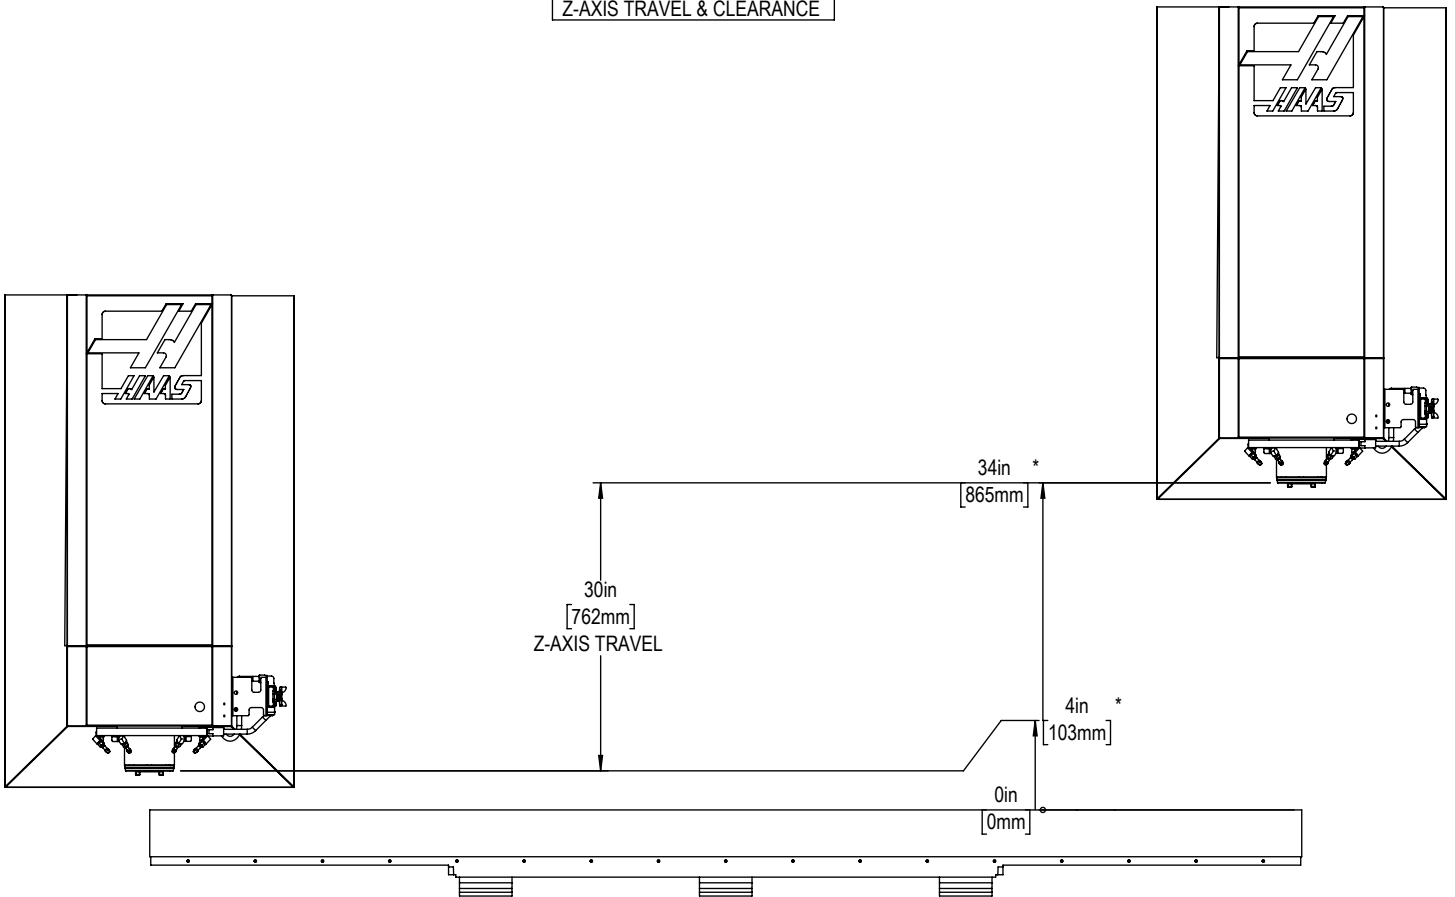

Table

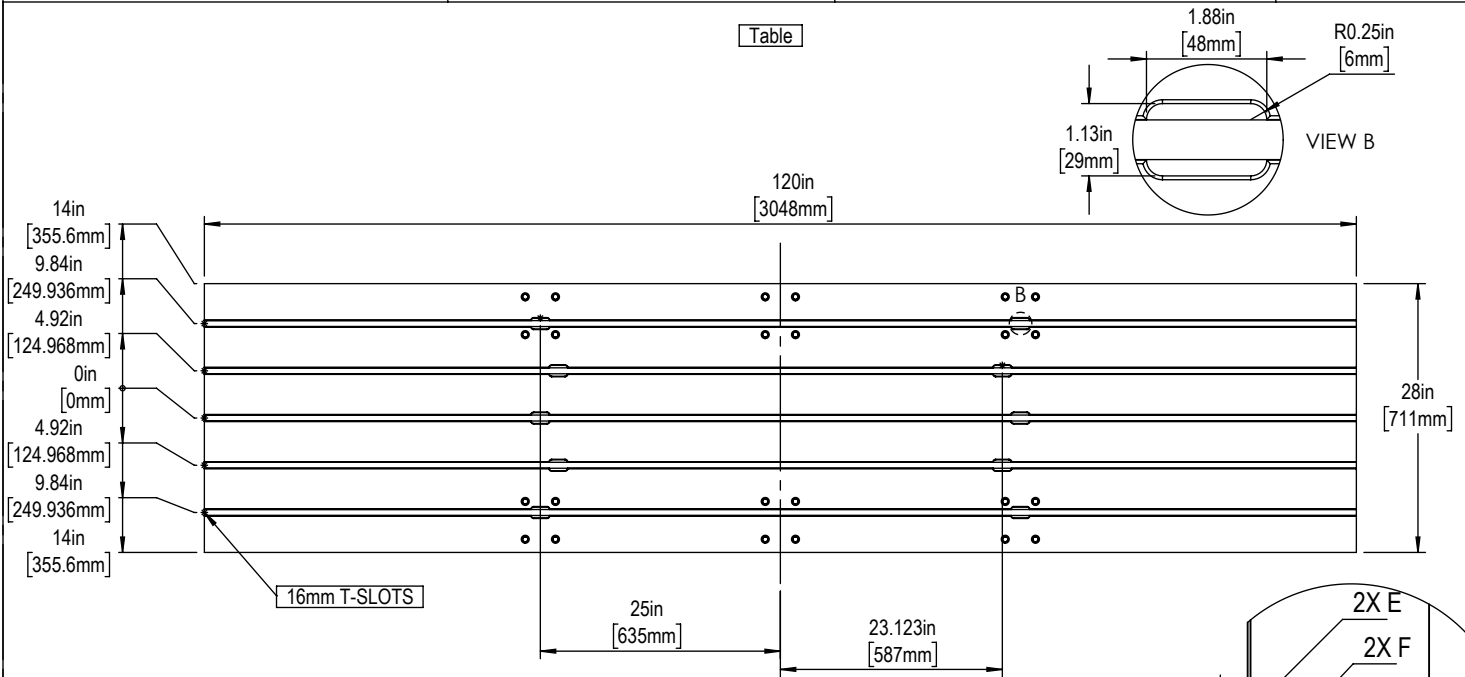

Slot Size	A	B	C	D	E	F
12mm	$0.438^{+0.002}_{-0.000}$	0.76 ± 0.02	0.310 ± 0.010	0.318 ± 0.010	$0.03 \times 45^\circ$	$0.020 \times 45^\circ$
16mm	0.628 ± 0.002	1.06 ± 0.02	0.640 ± 0.010	0.420 ± 0.010	$0.06 \times 45^\circ$	$0.020 \times 45^\circ$



Tool Changer

