

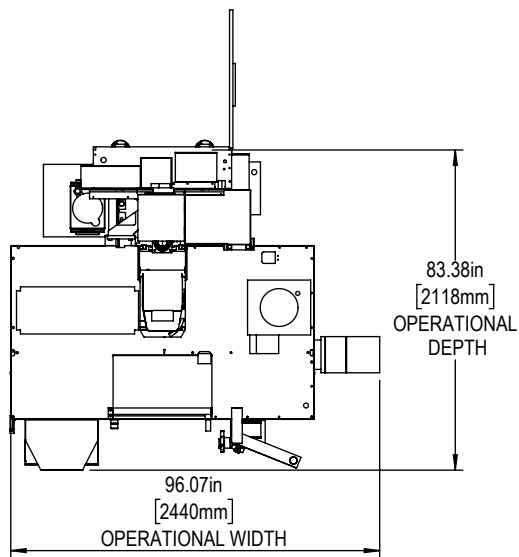
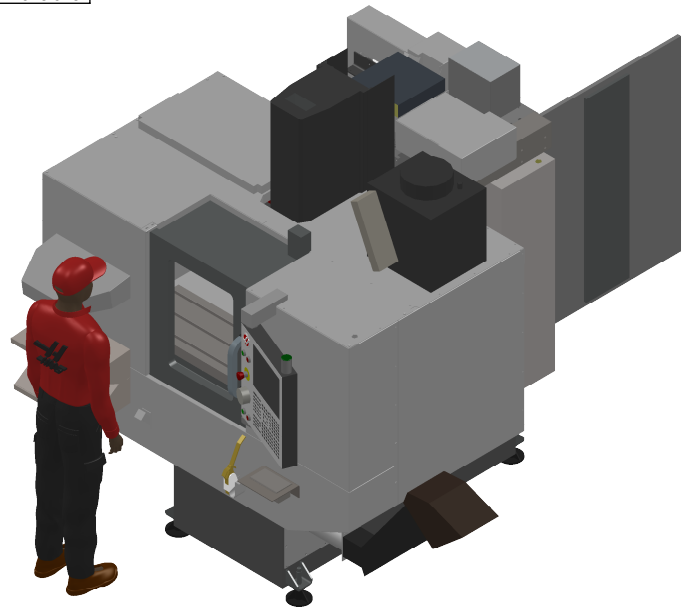


Installed Dimensions

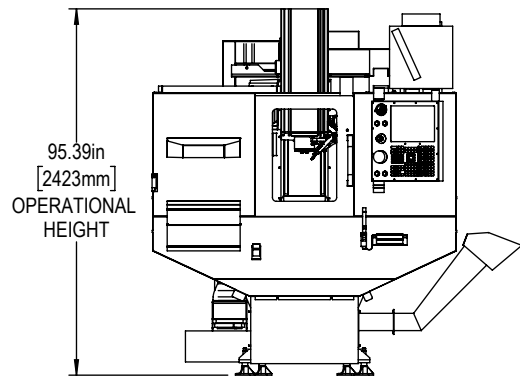



Leveling Pad Height

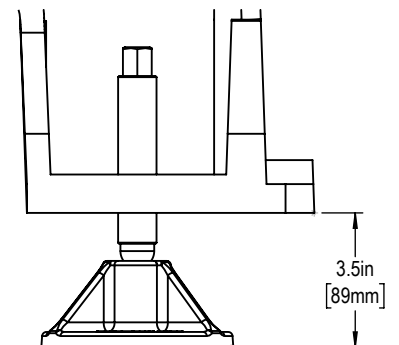



*All Height Dimensions Based on Suggested Leveling Pad Height

*ADD 4in for Extended Z-Clearance

Shipping Dimensions

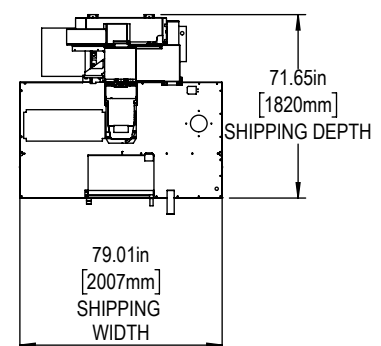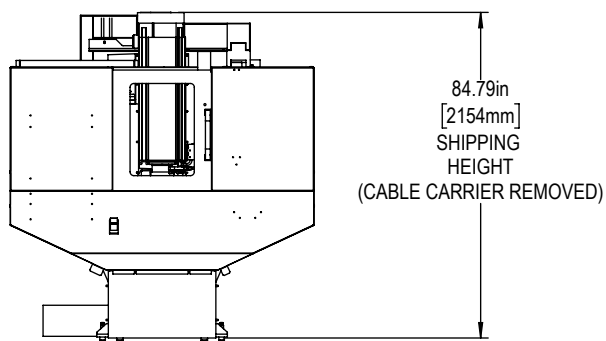

Air & Power

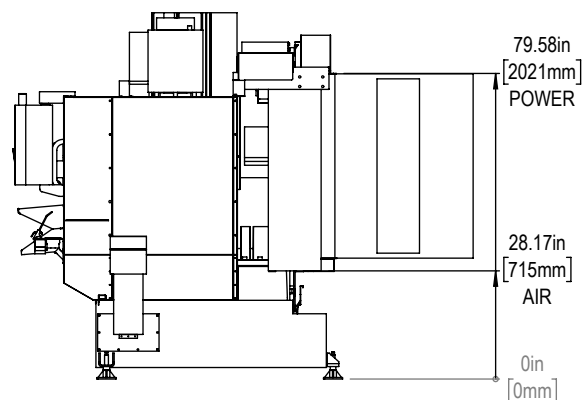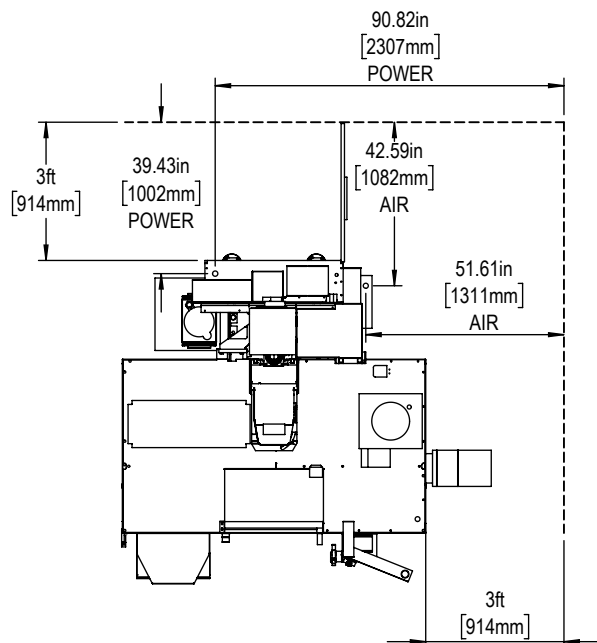

Maintain 3 feet [915mm] clearance to the nearest obstruction around all sides of machine perimeter for maintenance access

Note:

Machine must be placed on one continuous concrete slab. Slab should extend 12in [305mm] beyond anchor holes in all directions

Anchor Pattern



Anchor Hole Detail

Ø 5/8in[15.9mm]


▽ 2.0in[50mm] -

▽ 2.5in[66mm]


NOT AVAILABLE FOR THIS MACHINE

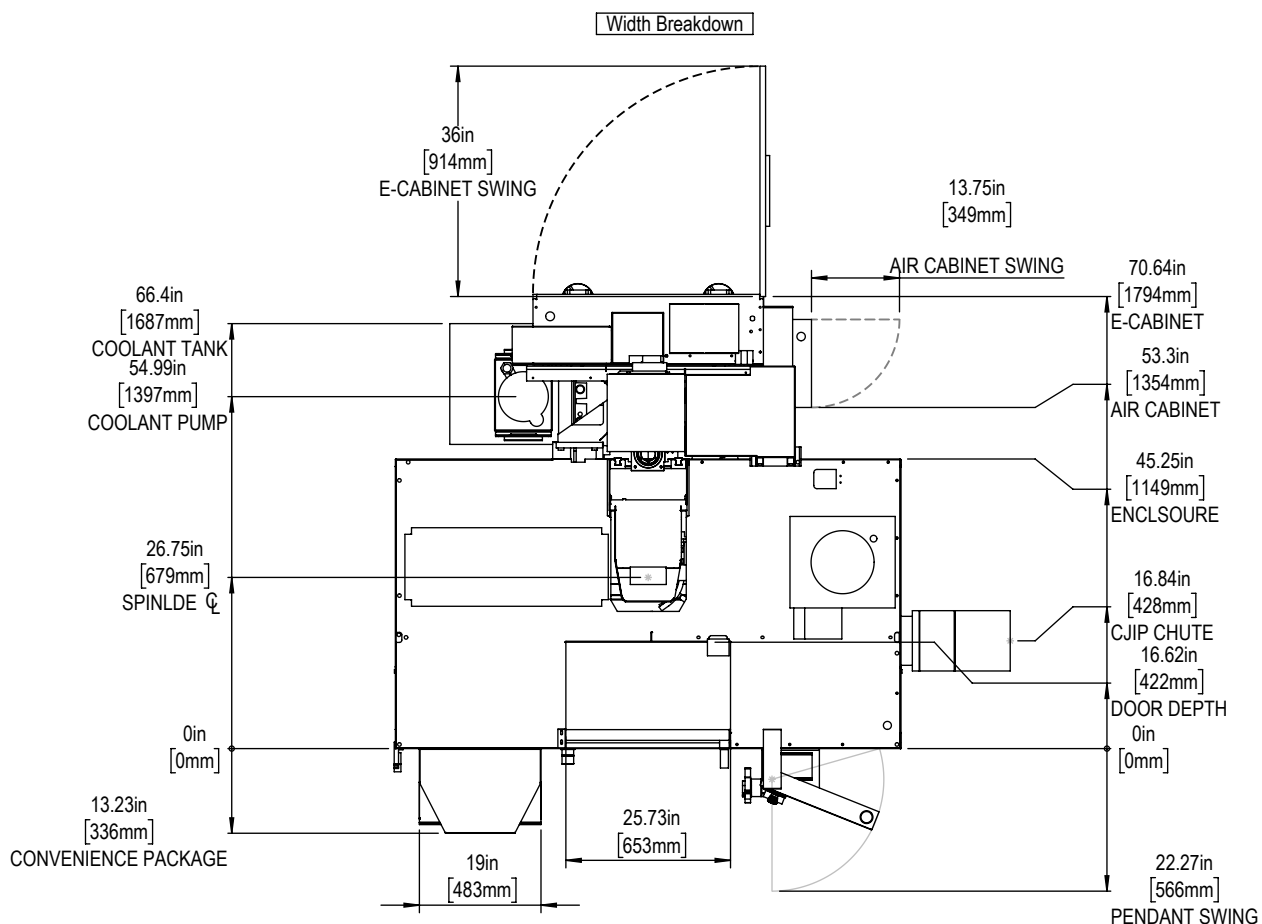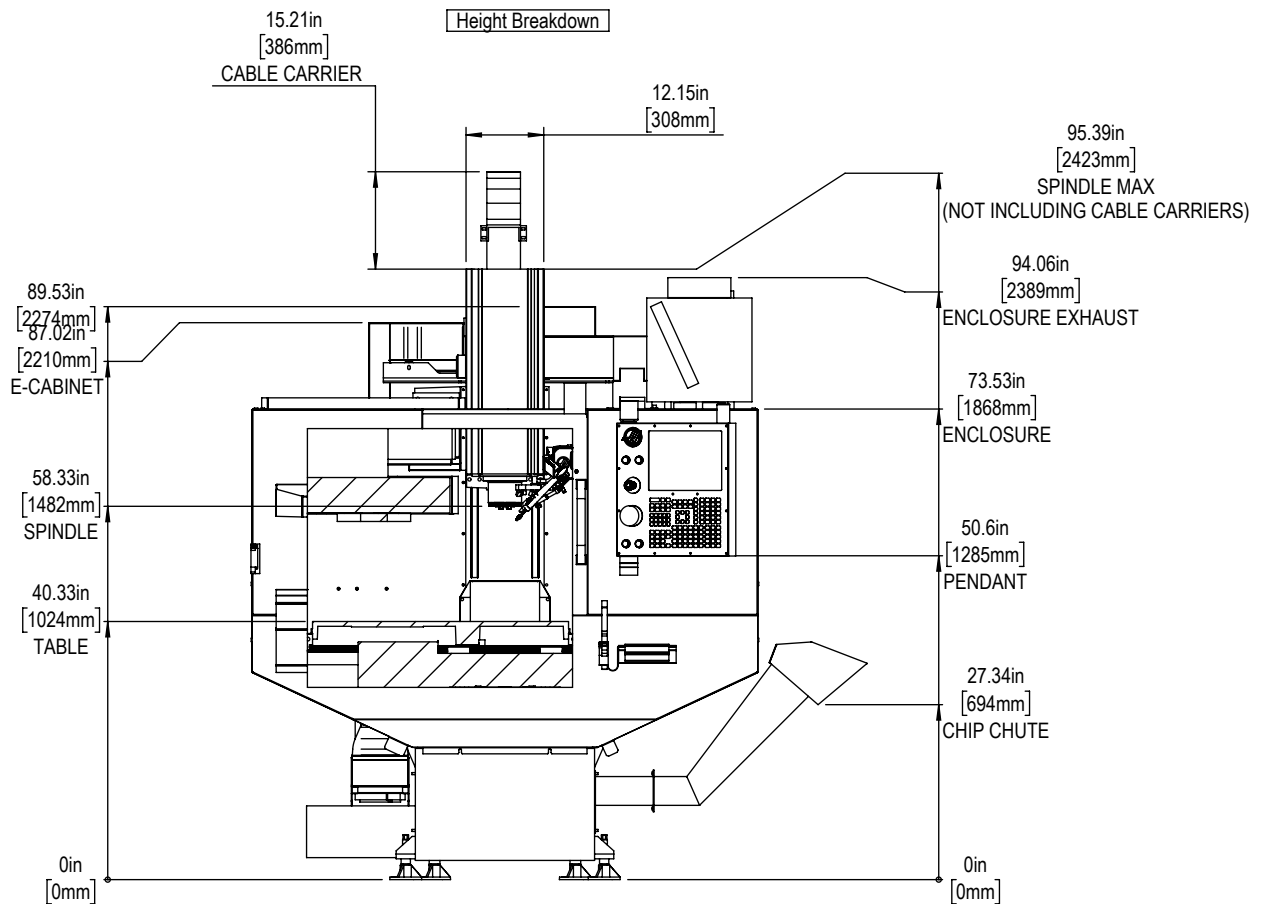

X&Y-Axis Travel and Clearance

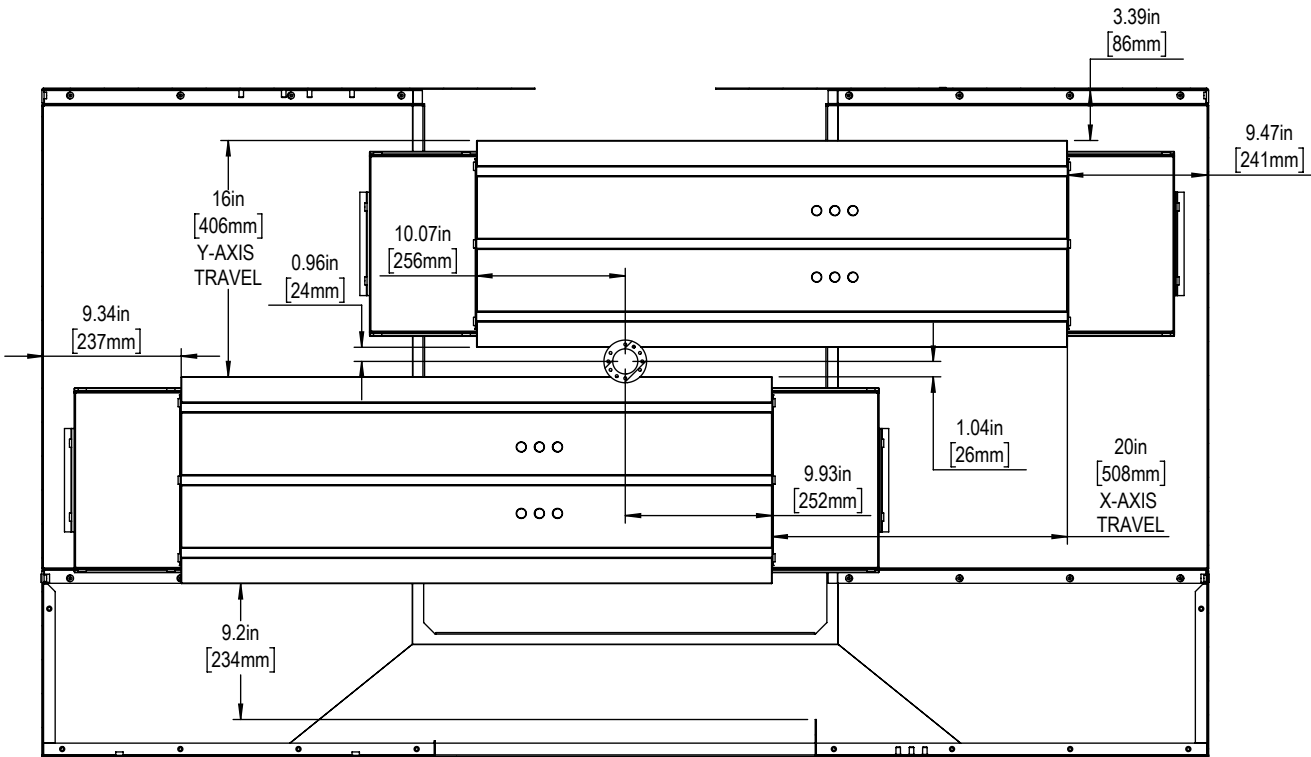


Z-AXIS TRAVEL & CLEARANCE

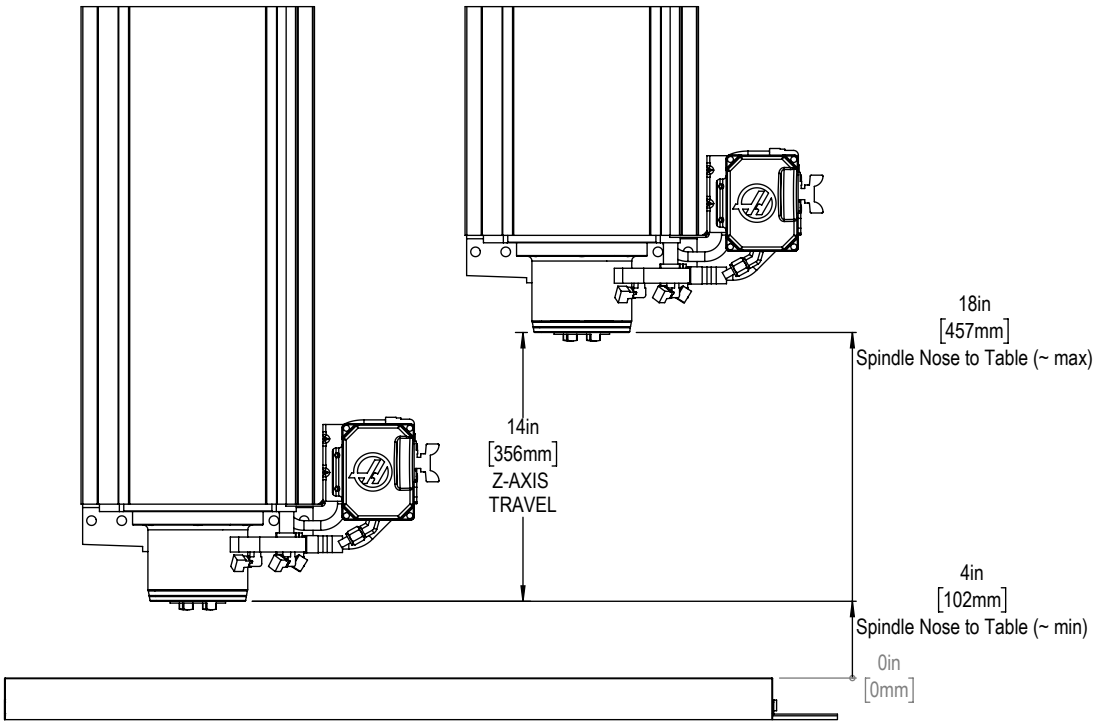


All dimensions based on stackup of sheetmetal, subject to variation of 1/2" (13 mm) Due to continual product improvements, dimensions are subject to change without notice

Table

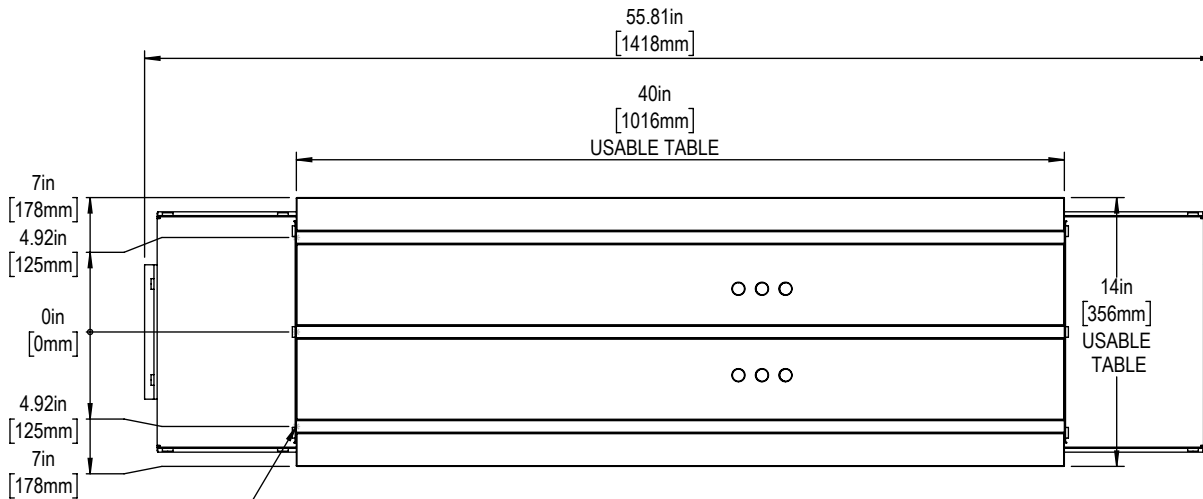

16mm T-SLOTS

Slot Size	A	B	C	D	E	F
12mm	$0.438 \begin{smallmatrix} +.002 \\ -.000 \end{smallmatrix}$	0.76 ± 0.02	0.310 ± 0.010	0.318 ± 0.010	$0.03 \times 45^\circ$	$0.020 \times 45^\circ$
16mm	0.628 ± 0.002	1.06 ± 0.02	0.640 ± 0.010	0.420 ± 0.010	$0.06 \times 45^\circ$	$0.020 \times 45^\circ$



T-Slot Dimensions in inches

20- Pocket Umbrella Tool Changer

