
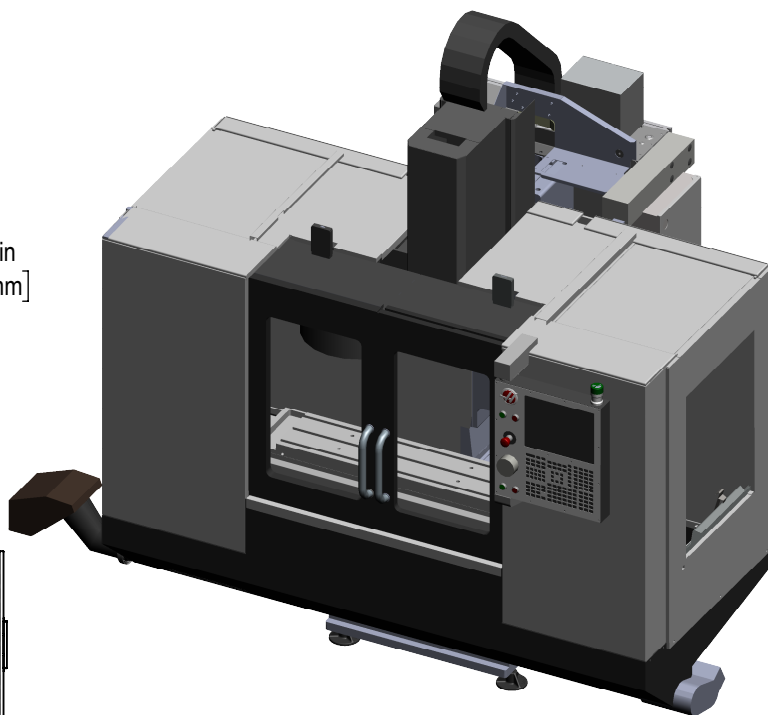
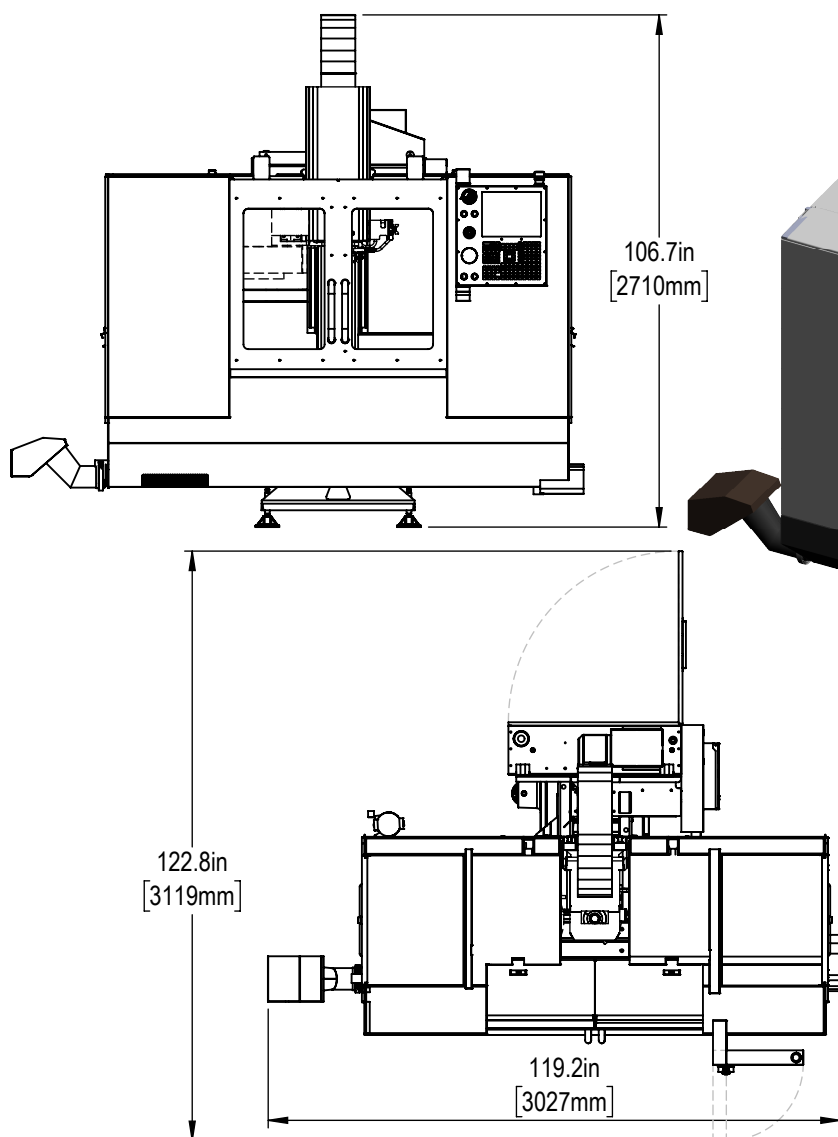
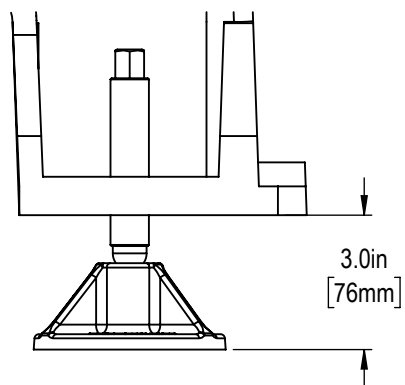



## Installed Dimensions



## Leveling Pad Height


Machine Lowest  
at 79.5" (2019mm)

## Shipping Dimensions

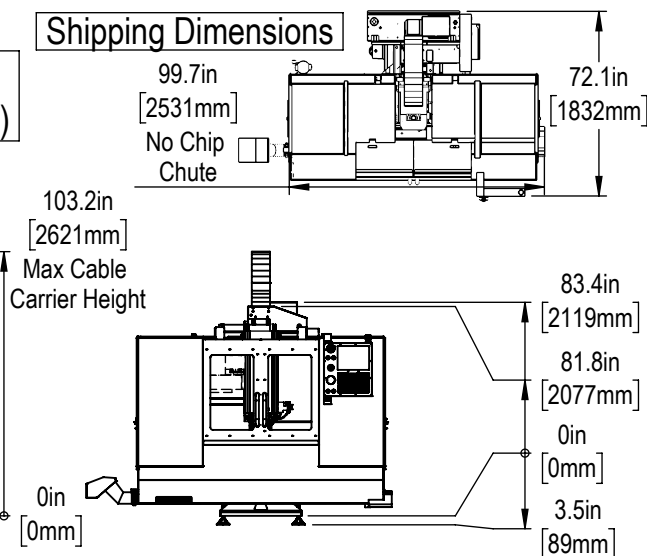


\*All Height Dimensions Based on Suggested Leveling Pad Height


## Air &amp; Power

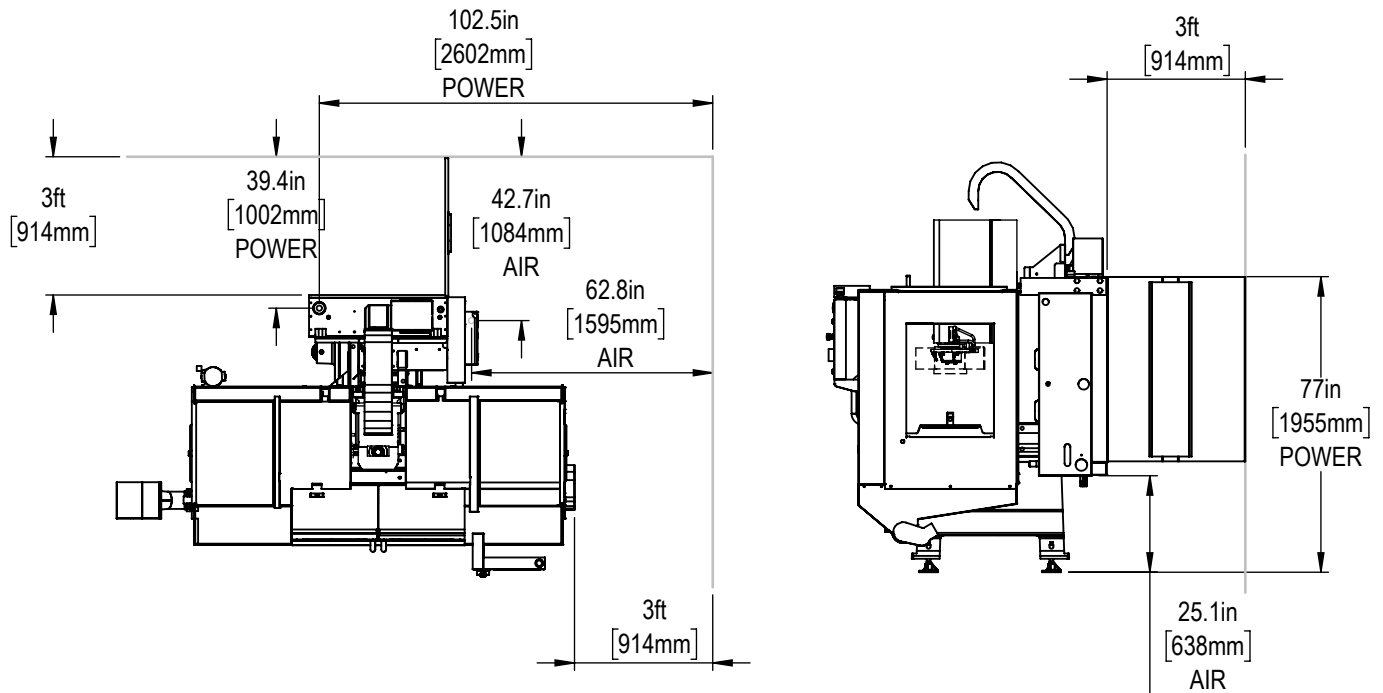


## Anchor Pattern

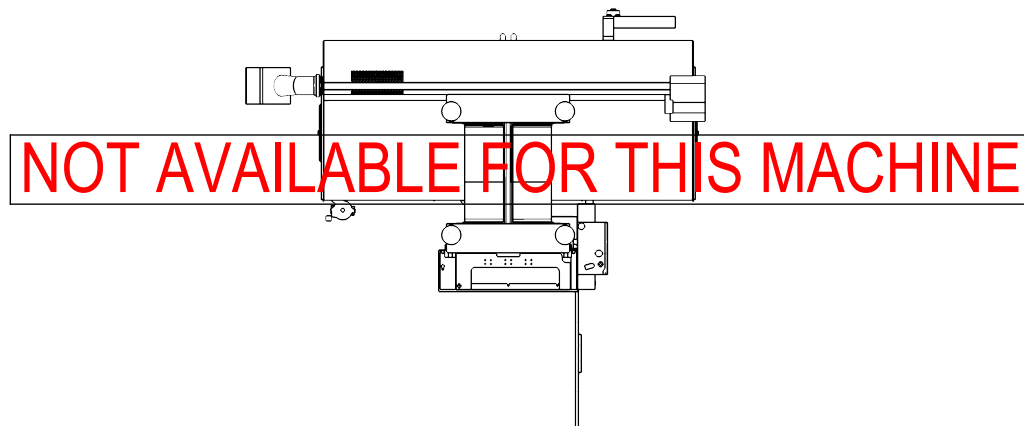

## Height Breakdown

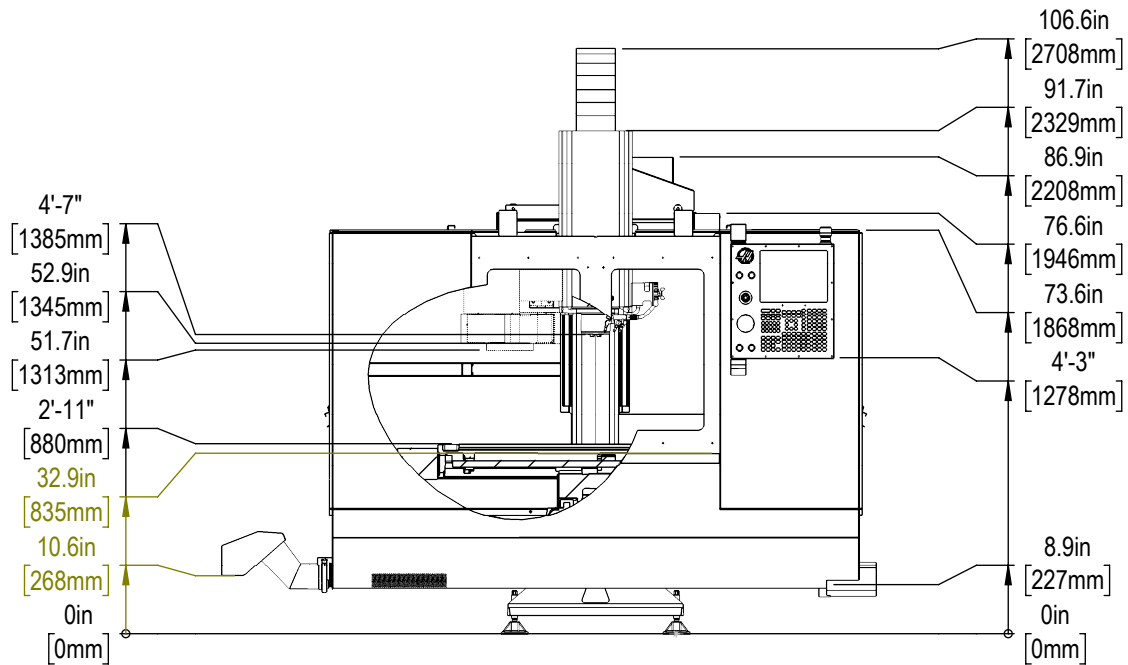


## Width Breakdown

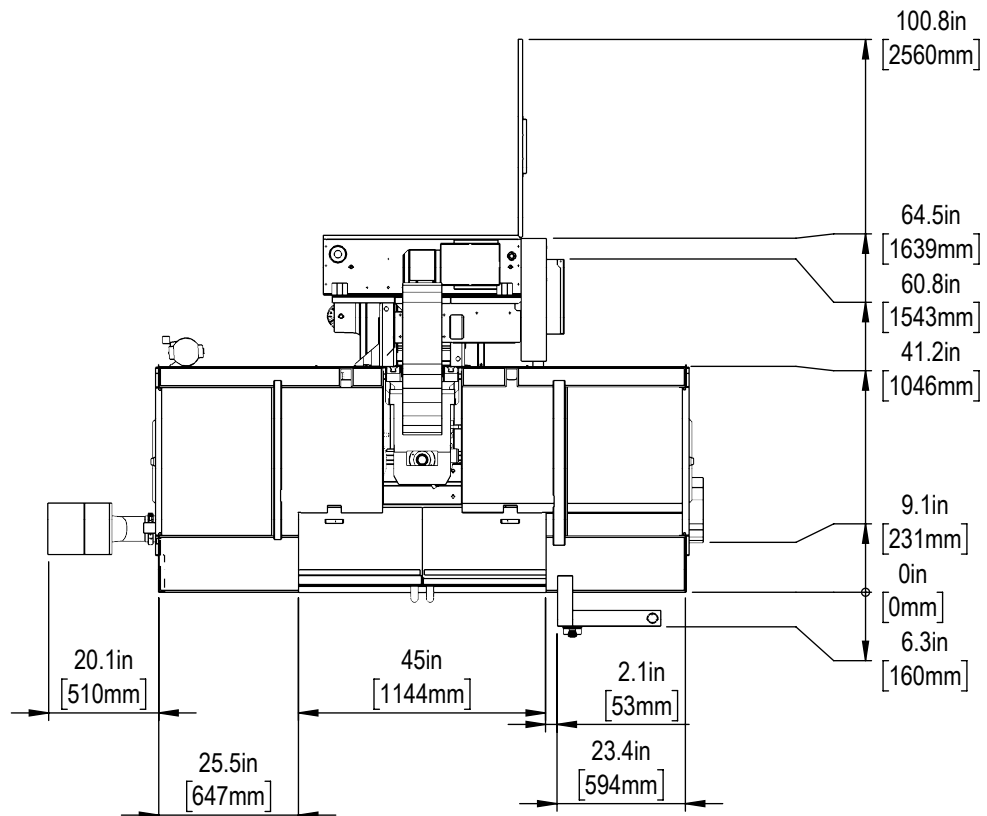



Maintain 3 feet [915mm] clearance to the nearest obstruction around all sides of machine perimeter for maintenance access

## X&amp;Y-Axis Travel

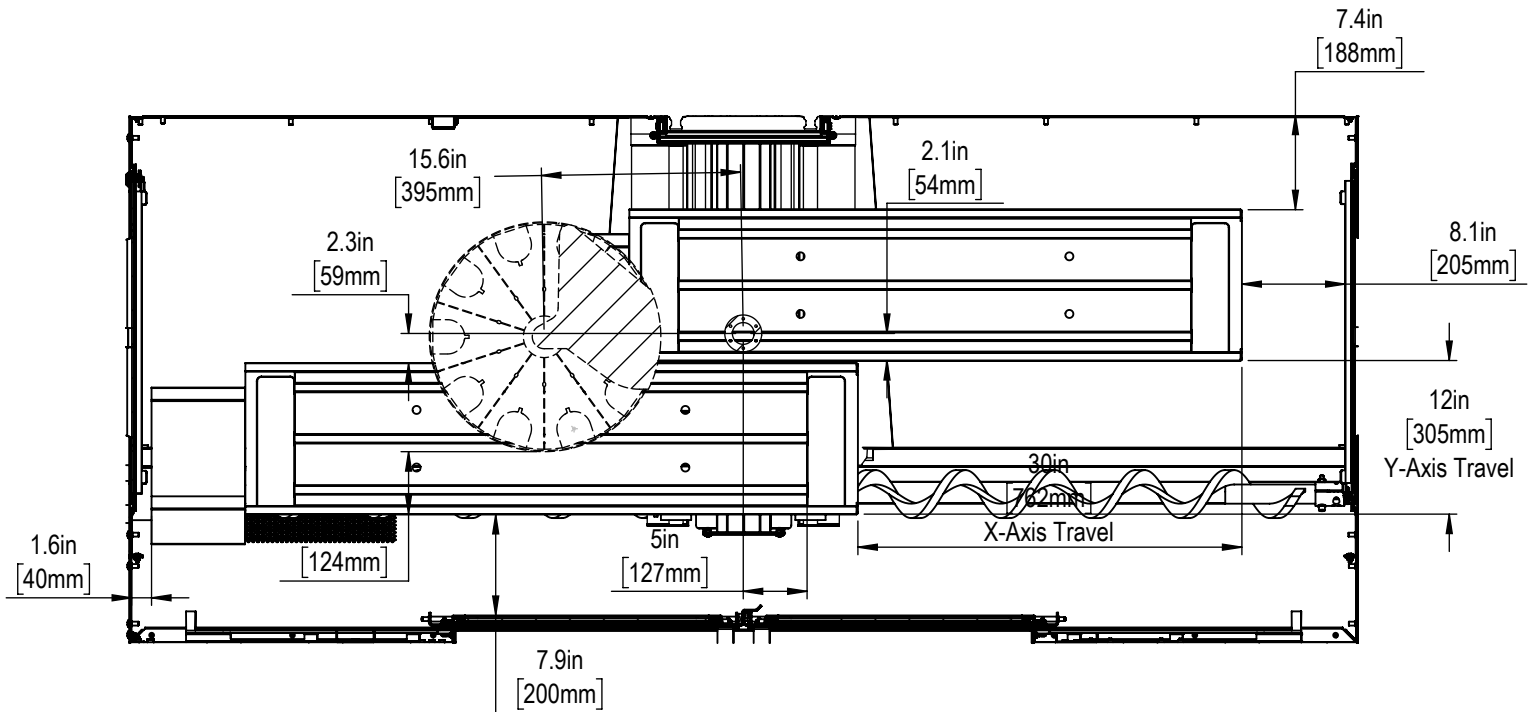

## Z-Axis Travel

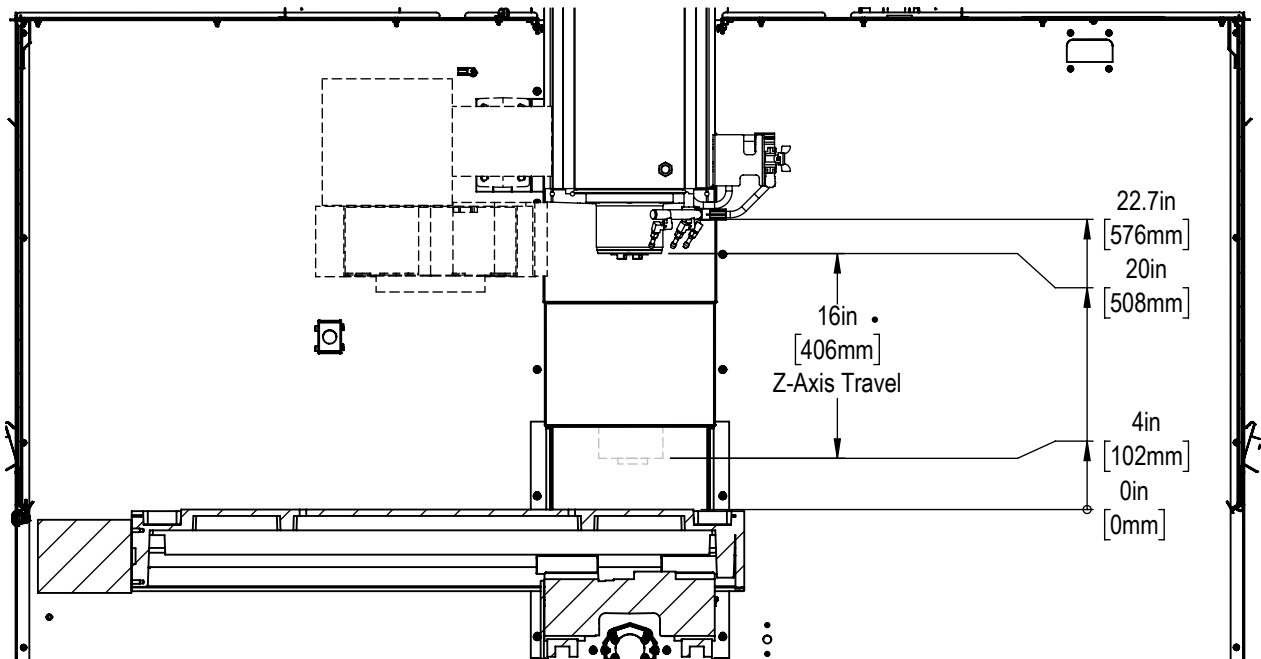

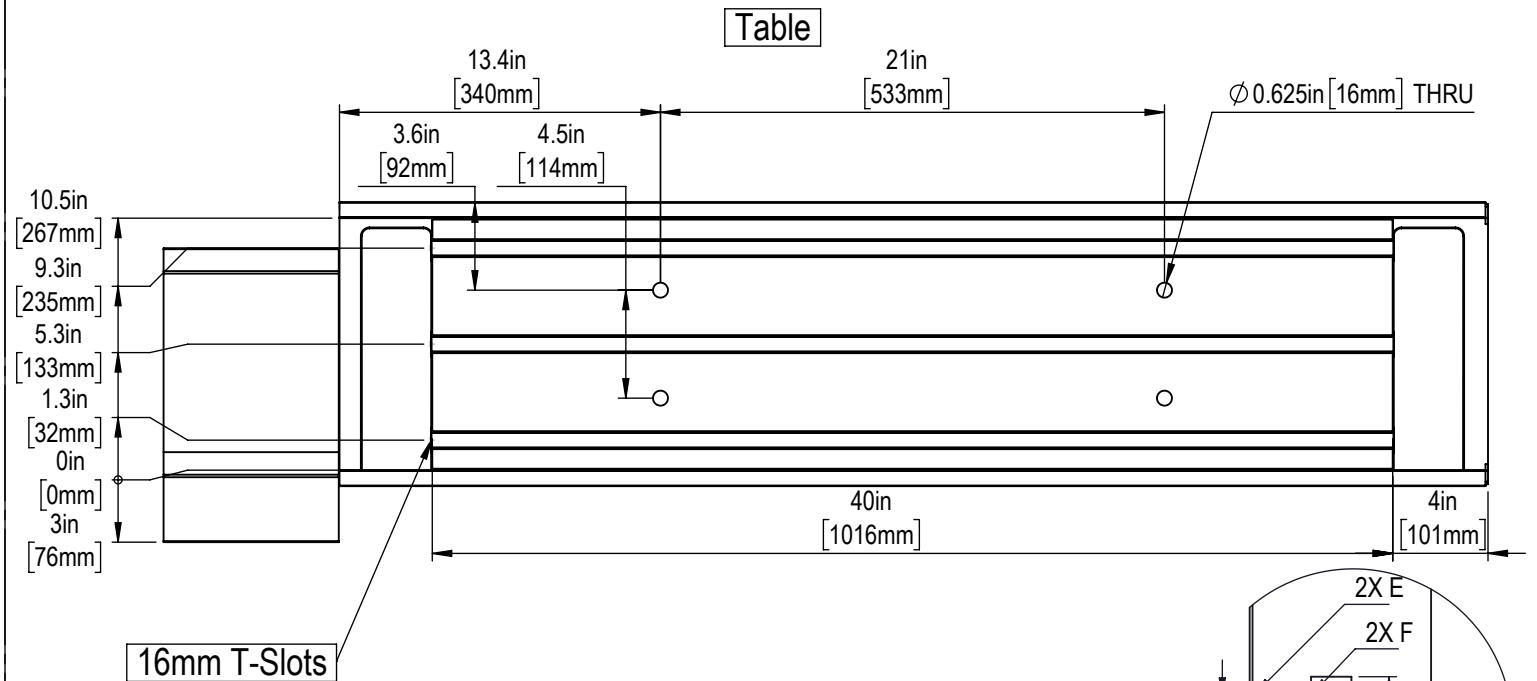

Slot Size	A	B	C	D	E	F
12mm	$0.438 \begin{smallmatrix} +.002 \\ -.000 \end{smallmatrix}$	$0.76 \pm 0.02$	$0.310 \pm 0.010$	$0.318 \pm 0.010$	$0.03 \times 45^\circ$	$0.020 \times 45^\circ$
16mm	$0.628 \pm 0.002$	$1.06 \pm 0.02$	$0.640 \pm 0.010$	$0.420 \pm 0.010$	$0.06 \times 45^\circ$	$0.020 \times 45^\circ$

**Tool Changer**