




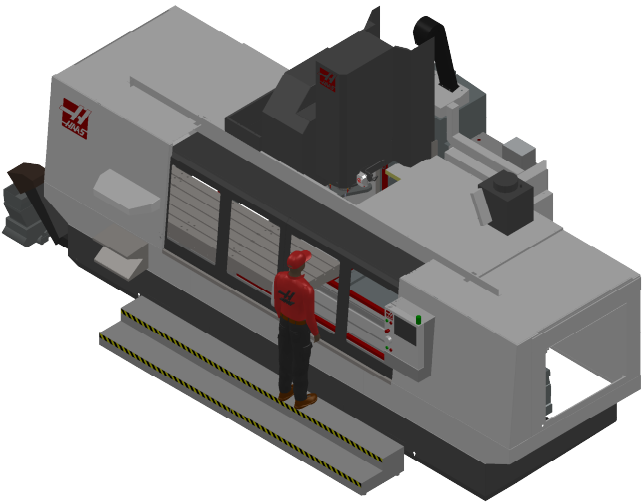


Installed Dimensions

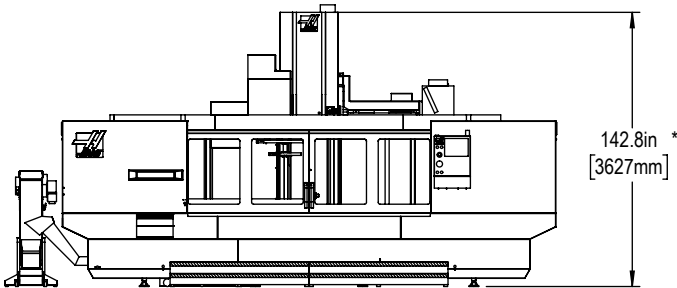

NOTE: 8" EXTENDED Z-AXIS CLEARANCE OPTION
ADDS 8" (203mm) TO DIMENSIONS WITH *


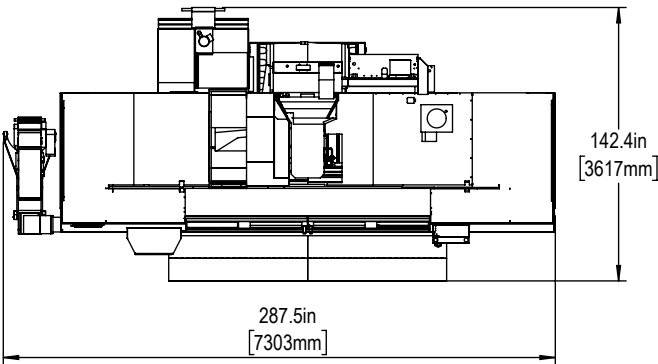


Leveling Pad Height


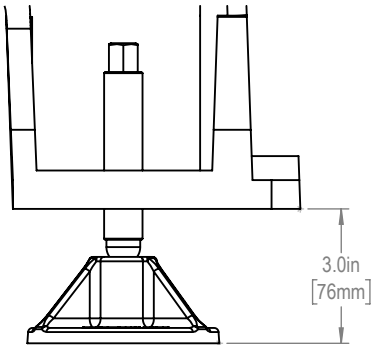


*All Height Dimensions Based on Suggested Leveling Pad Height

Shipping Dimensions

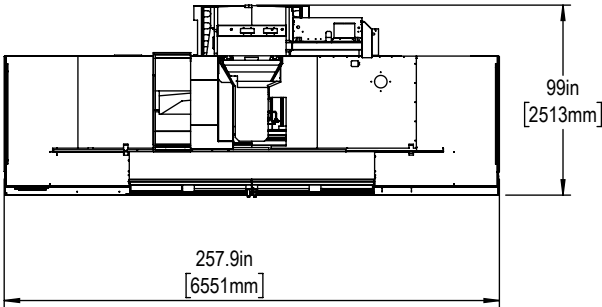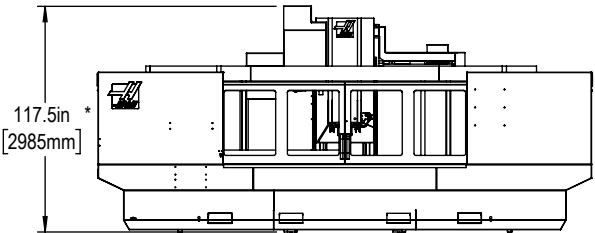

Air & Power

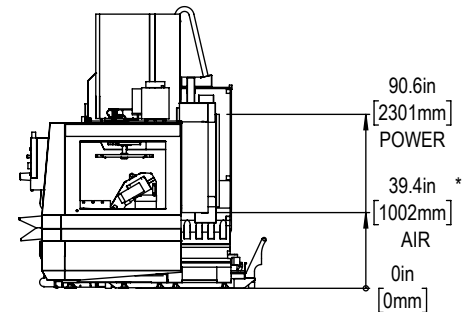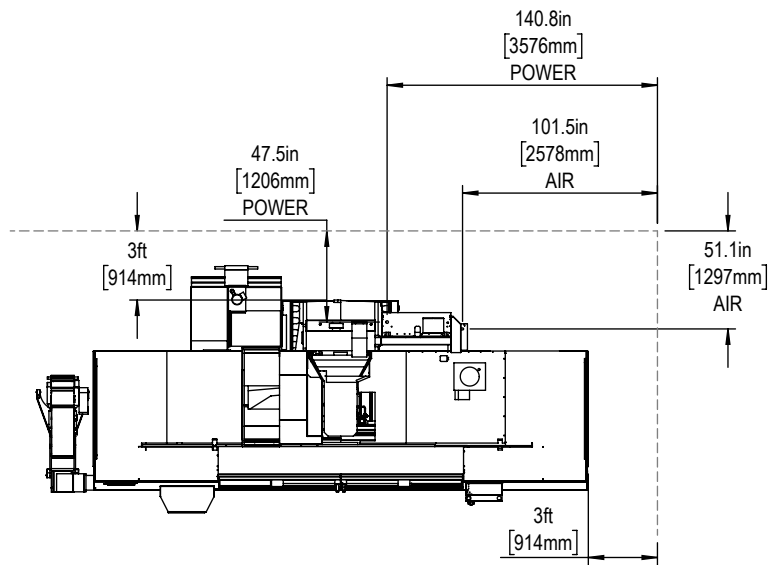

Maintain 3 feet [915mm] clearance to the nearest obstruction around all sides of machine perimeter for maintenance access

Note:

Machine must be placed on one continuous concrete slab. Slab should extend 12in [305mm] beyond anchor holes in all directions

Anchor Pattern

For machines built before Oct. 2023

NOTE: For machines built after Oct. 2023, see separate Anchoring Template.


Anchor Hole Detail

Ø 5/8in [15.8mm]

▽ 2.0in [51mm]

▽ 2.25in [57mm]

0in [0mm]

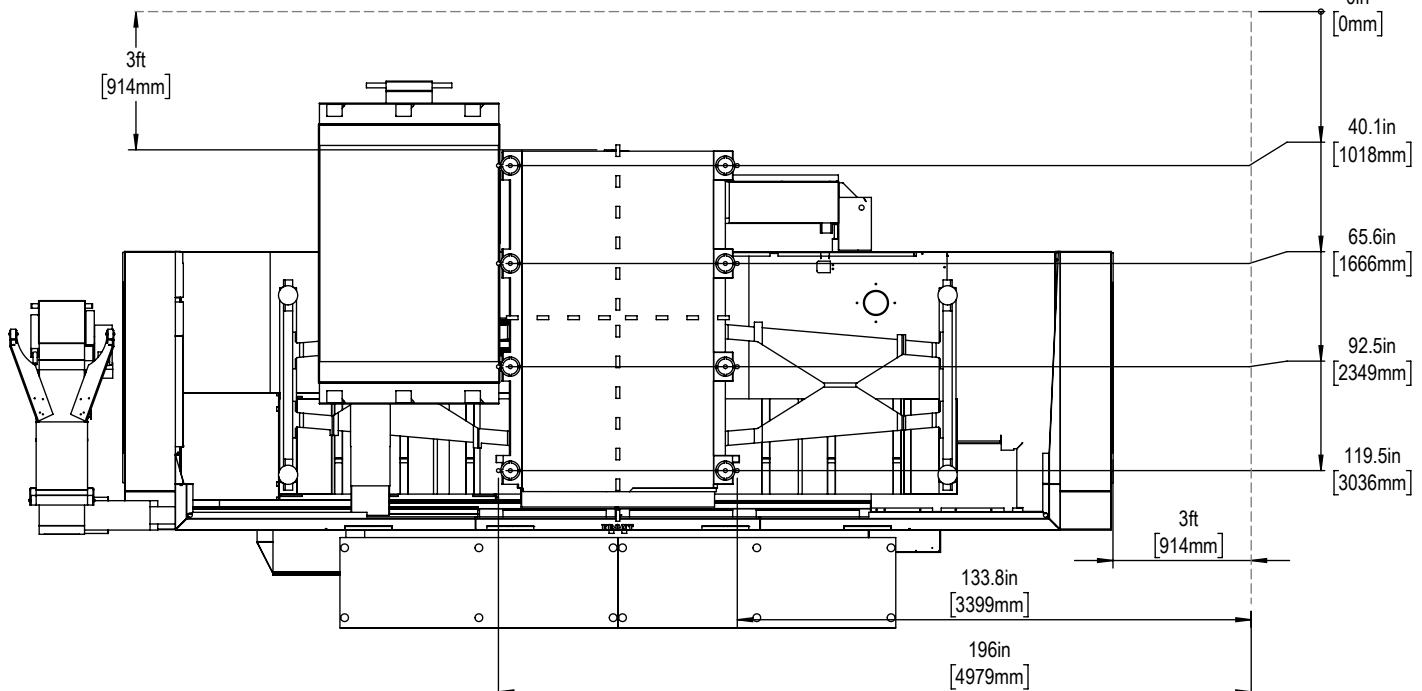


For precise locations and specifications please use template in Anchoring Kit found at Haascnc.com


All dimensions based on stackup of sheetmetal, subject to variation of 1/2" (13 mm) Due to continual product improvements, dimensions are subject to change without notice



Height Breakdown

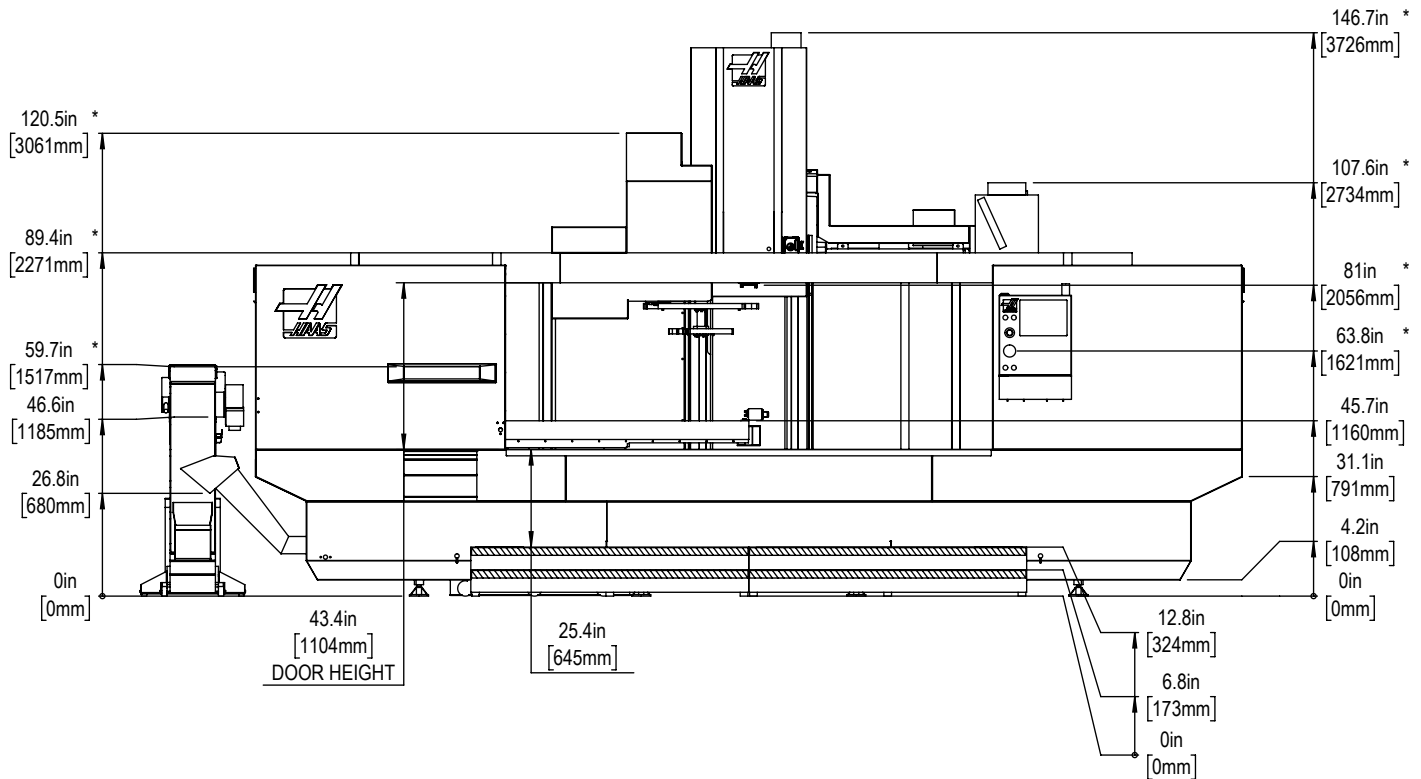


Width Breakdown

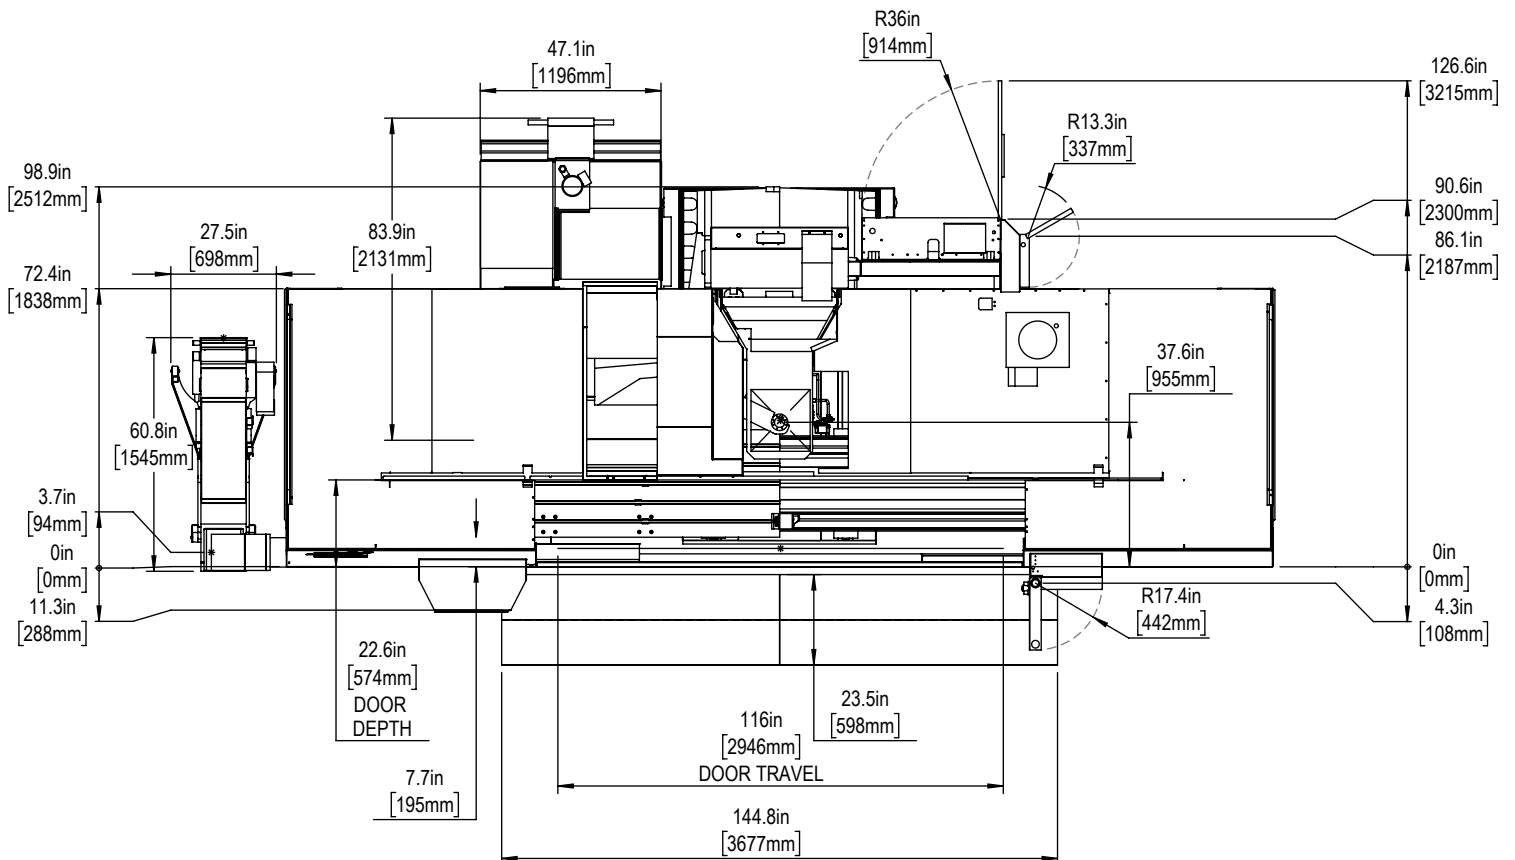



X&Y-Axis Travel and Clearance

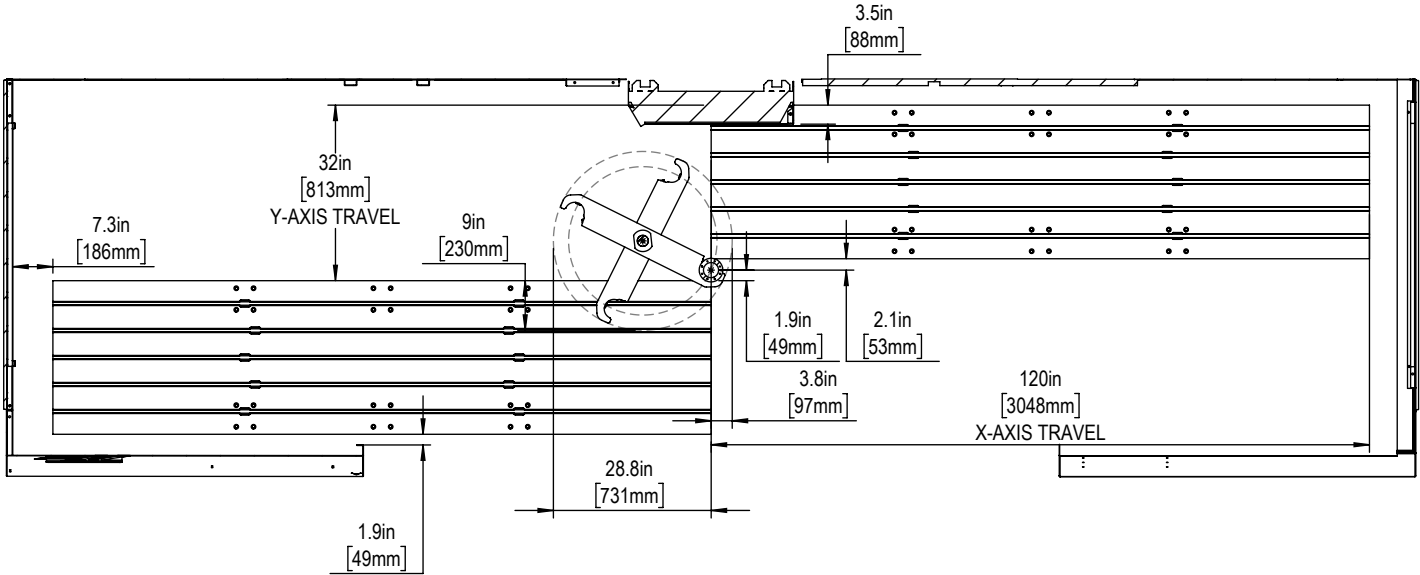

Z-AXIS TRAVEL & CLEARANCE

