

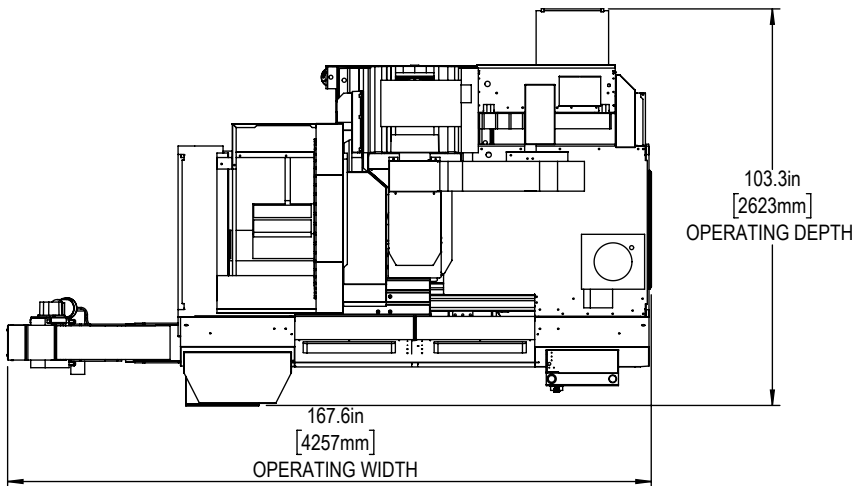
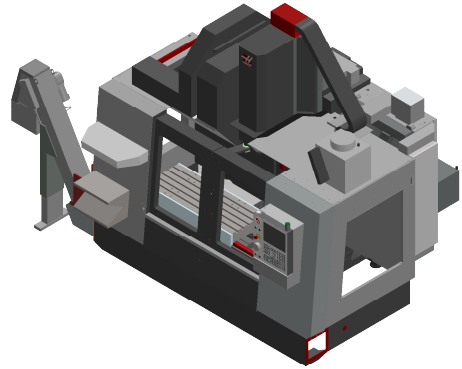


Installed Dimensions


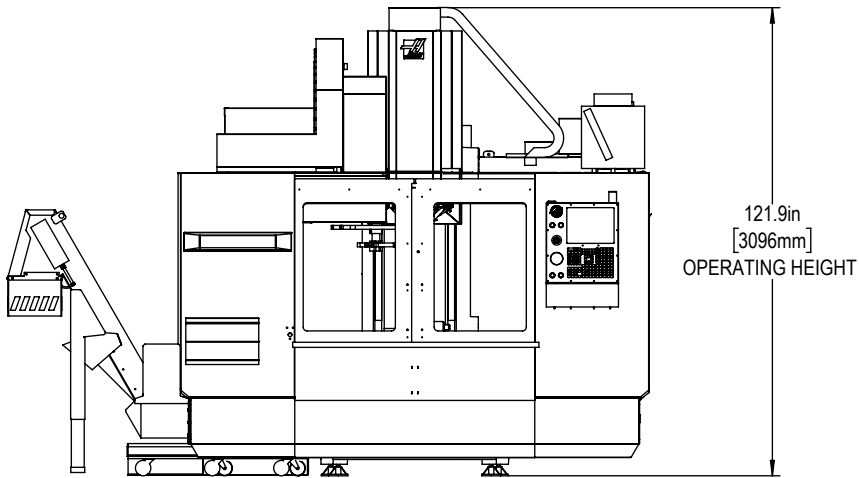


Leveling Pad Height

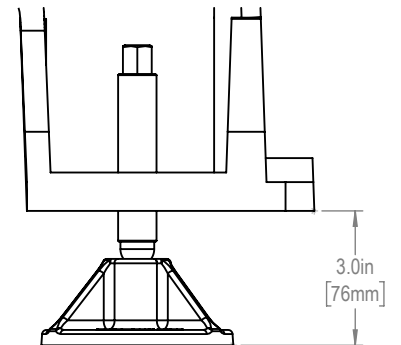


*All Height Dimensions Based on Suggested Leveling Pad Height

Shipping Dimensions

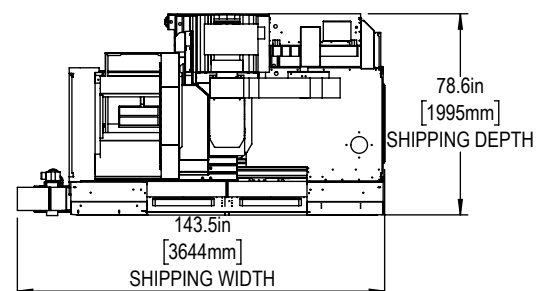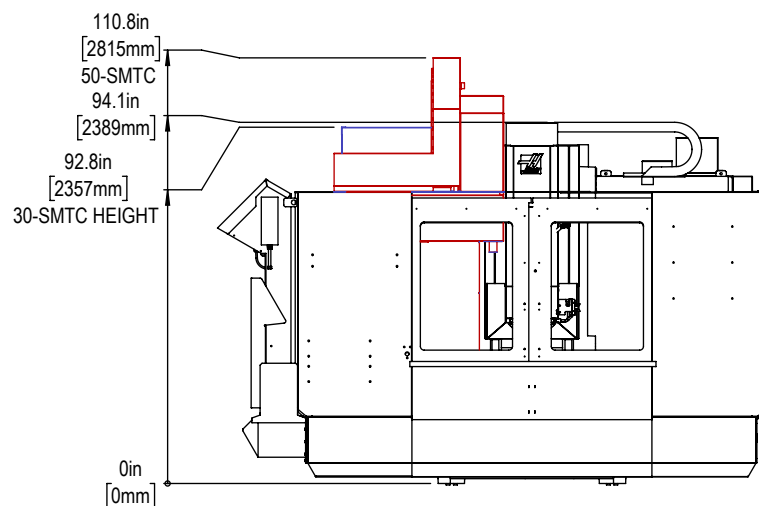

Air & Power

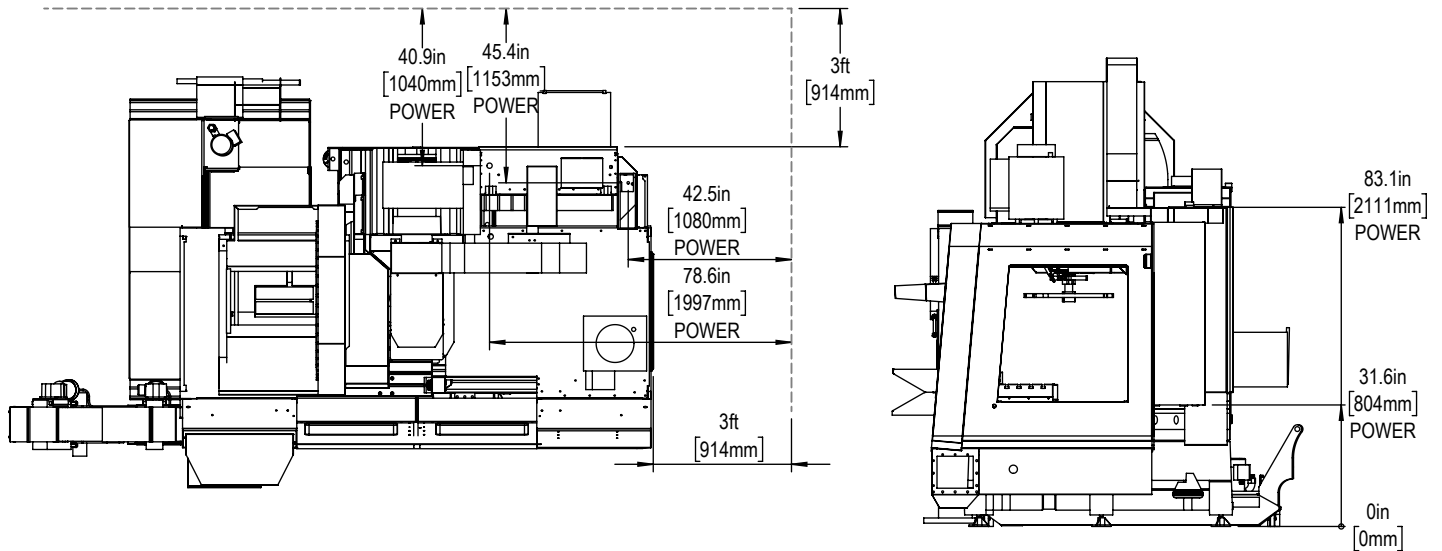

Maintain 3 feet [915mm] clearance to the nearest obstruction around all sides of machine perimeter for maintenance access

Note:


Machine must be placed on one continuous concrete slab. Slab should extend 12in [305mm] beyond anchor holes in all directions

Anchor Pattern

Anchor Hole Detail

Ø 1.0in[25mm]


▽ 3.5in[90mm]

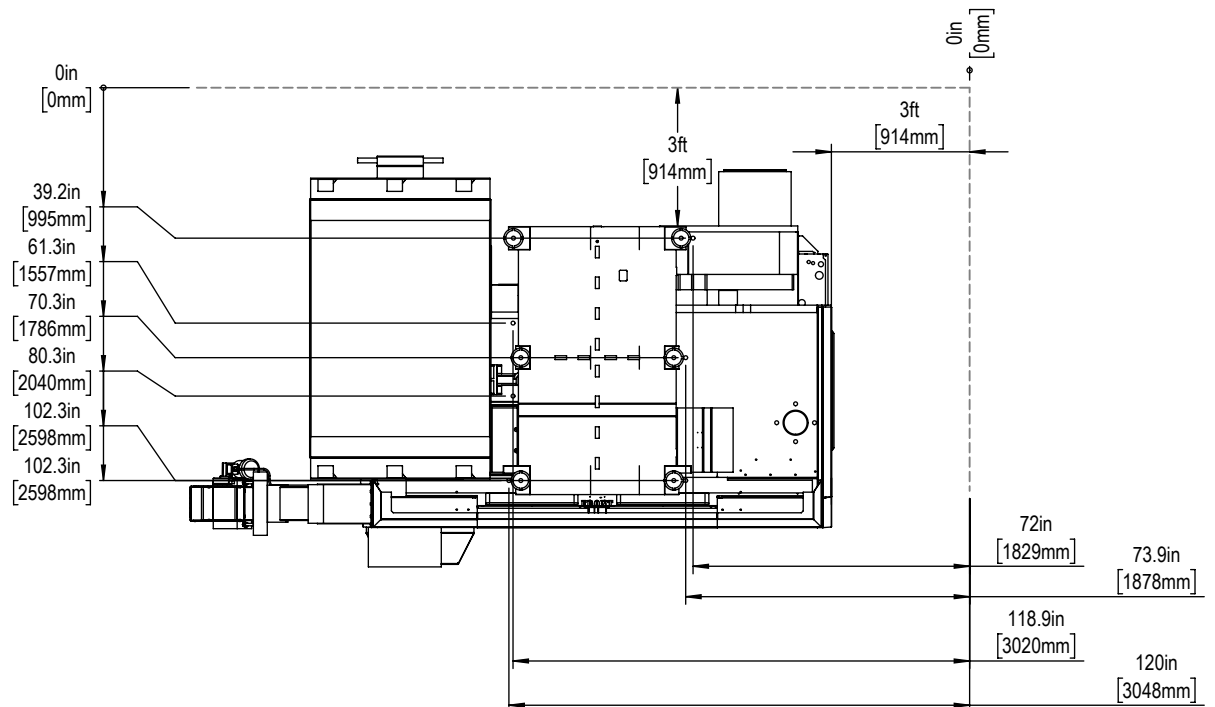


For precise locations and specifications please use template in Anchoring Kit found at Haascnc.com

All dimensions based on stackup of sheetmetal, subject to variation of 1/2" (13 mm) Due to continual product improvements, dimensions are subject to change without notice


Height Breakdown

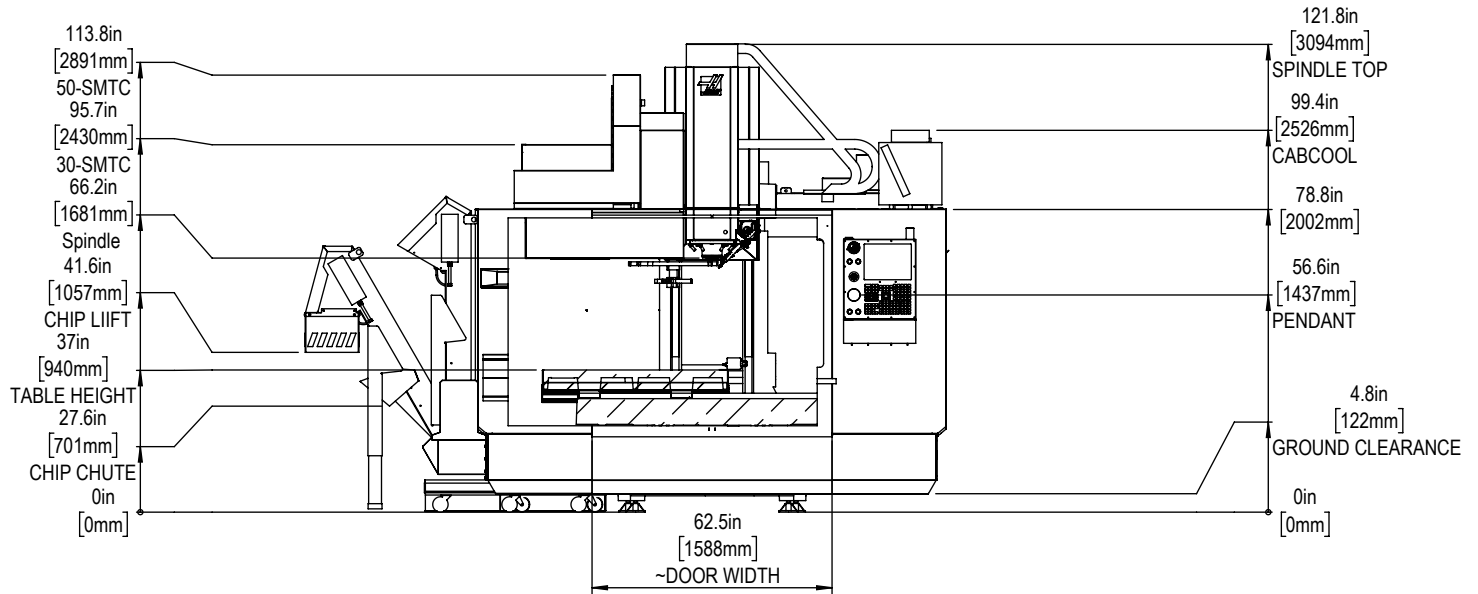


Width Breakdown

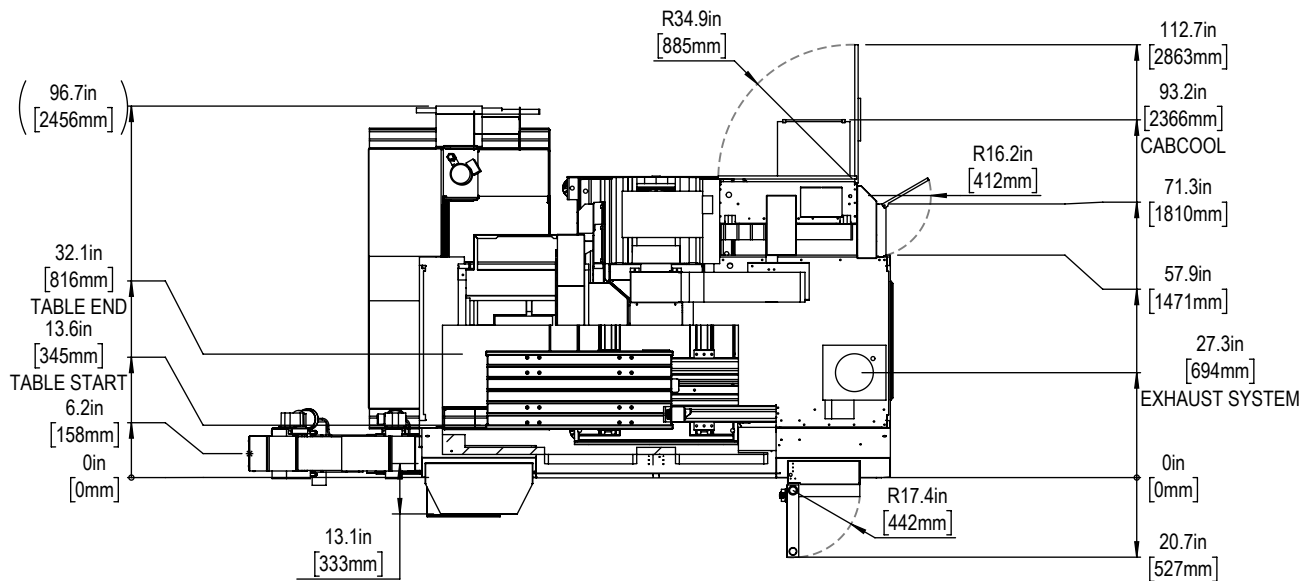



X&Y-Axis Travel and Clearance

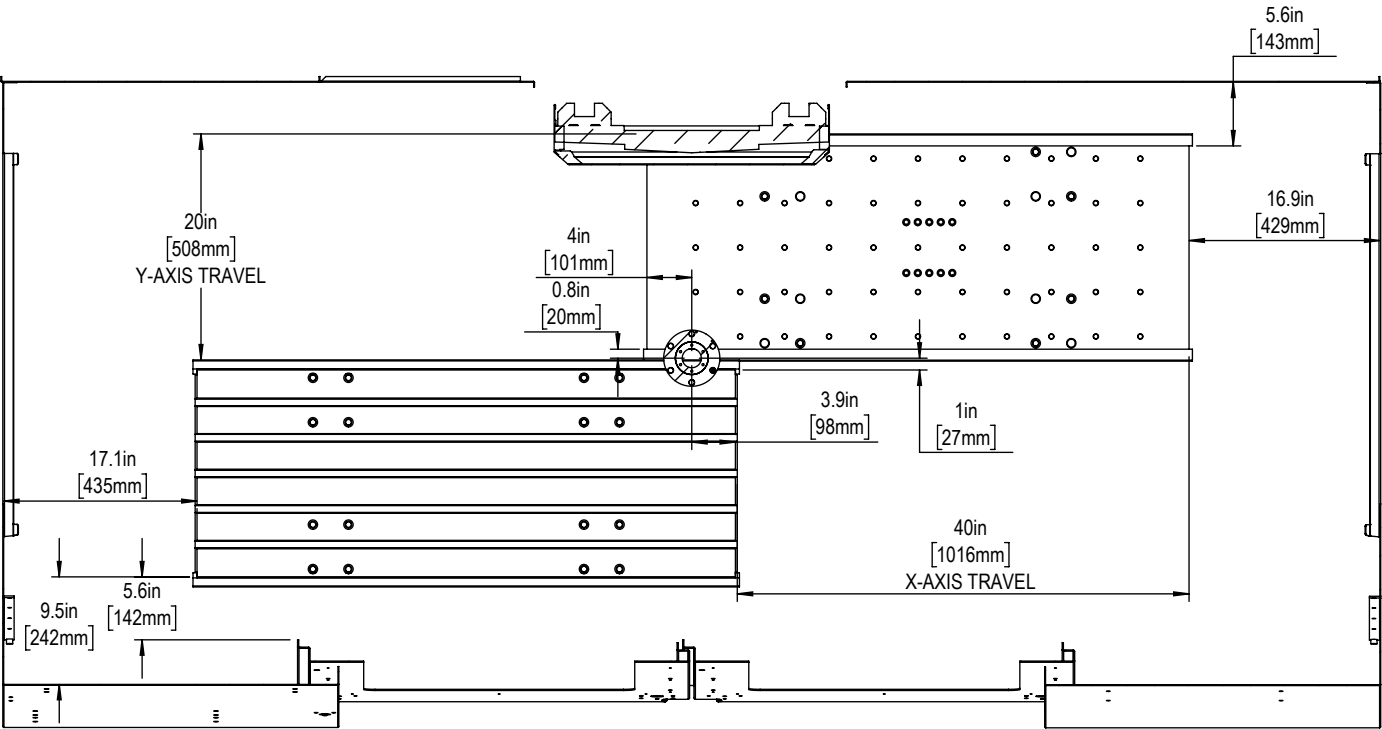


Z-AXIS TRAVEL & CLEARANCE

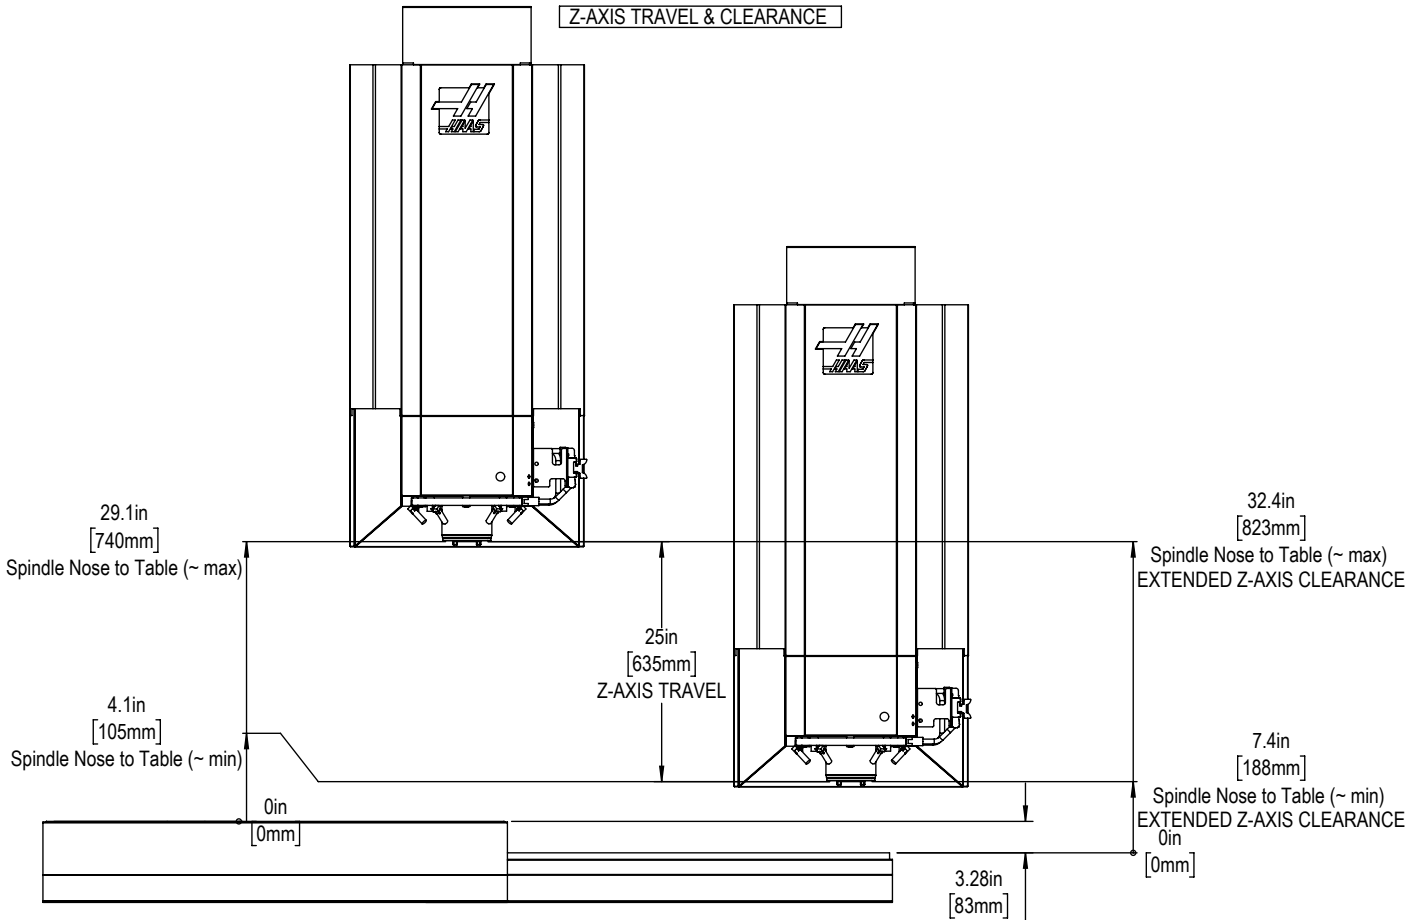

Table

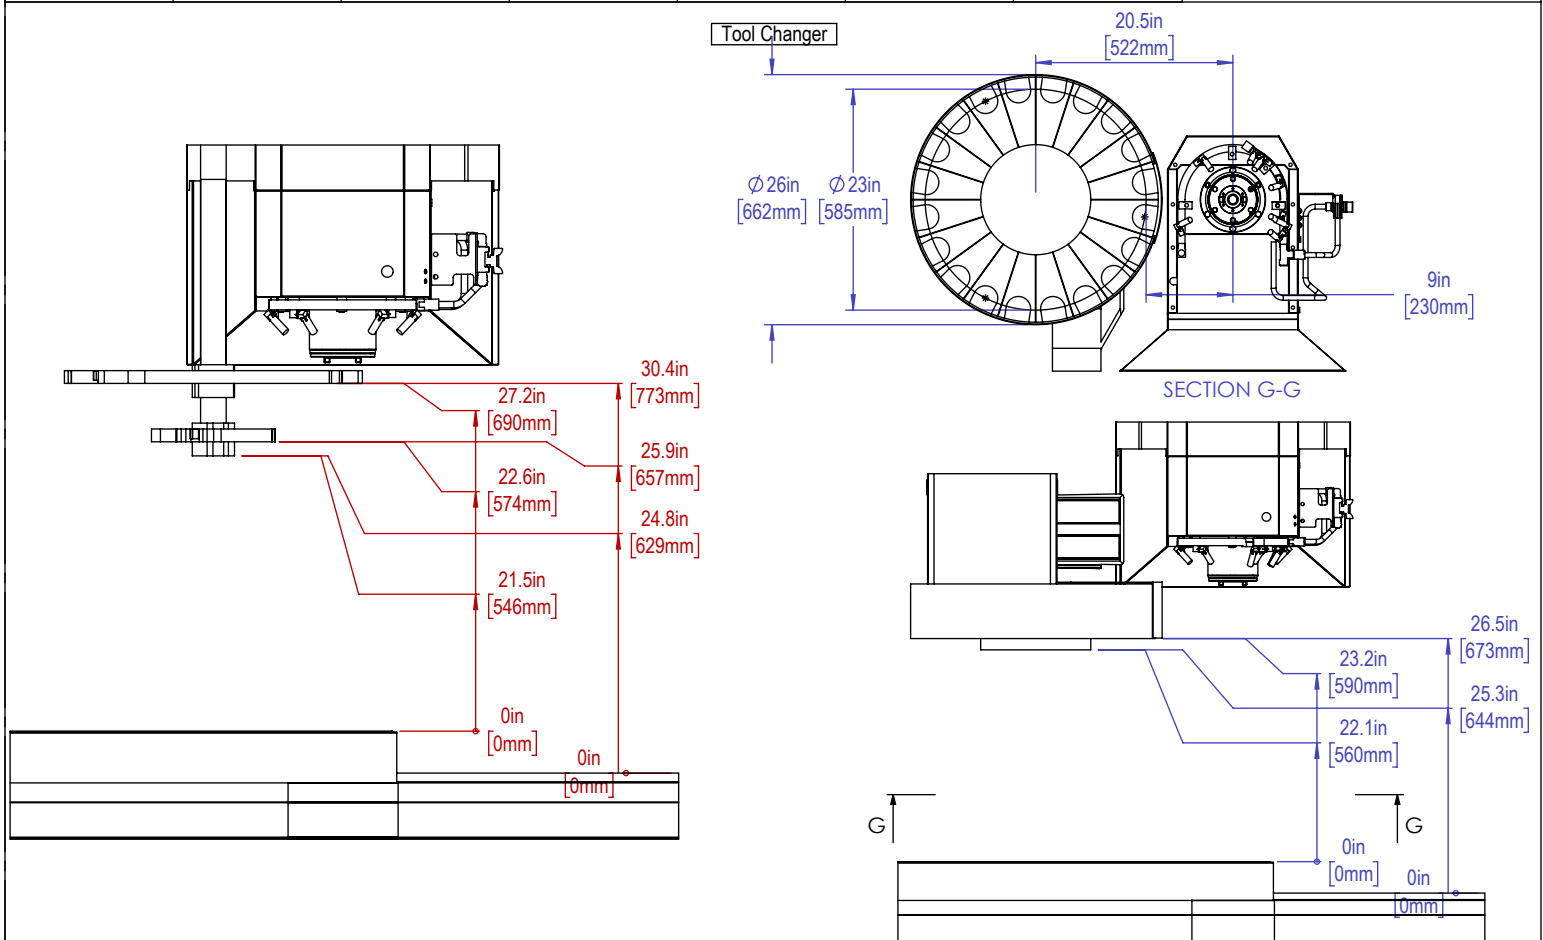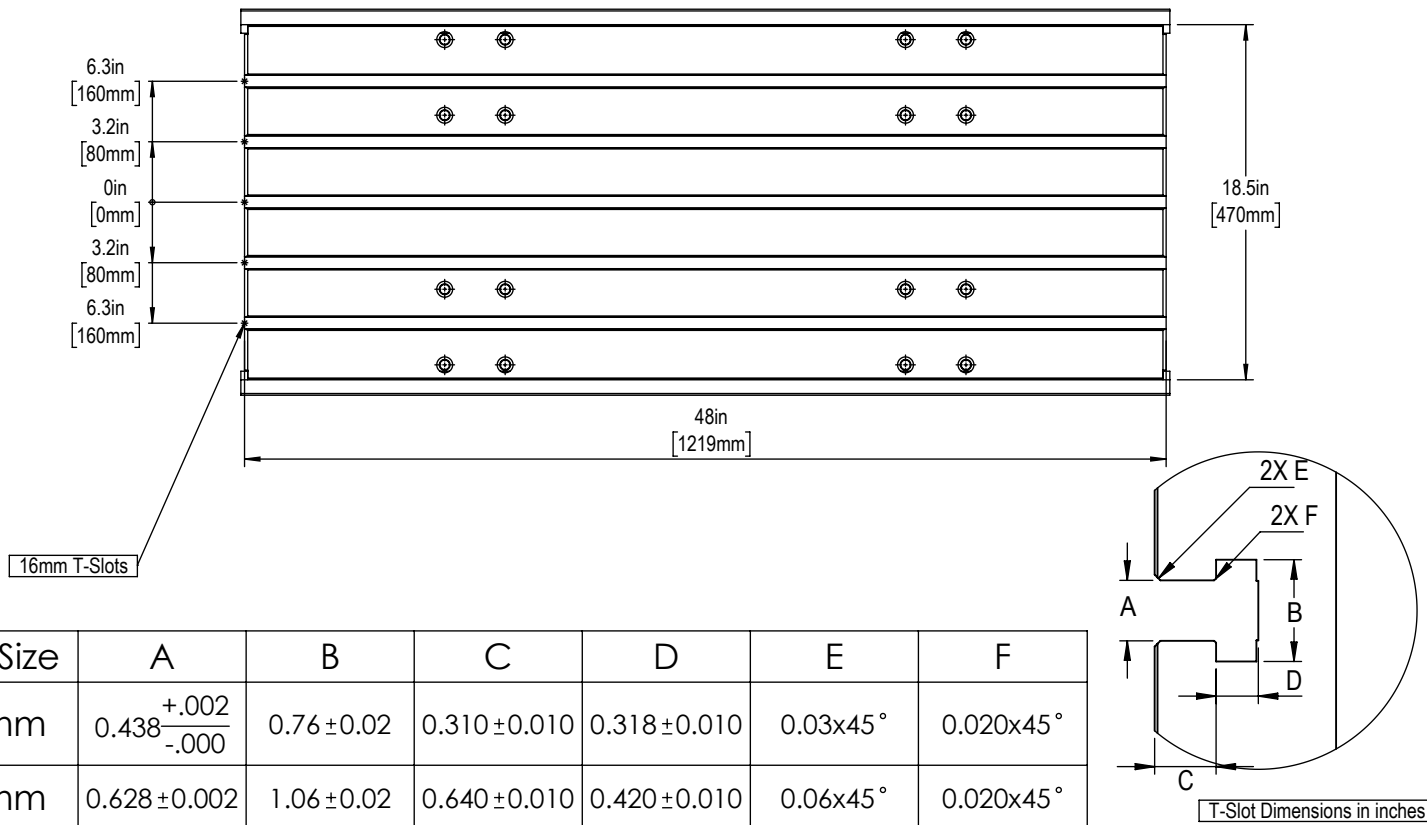


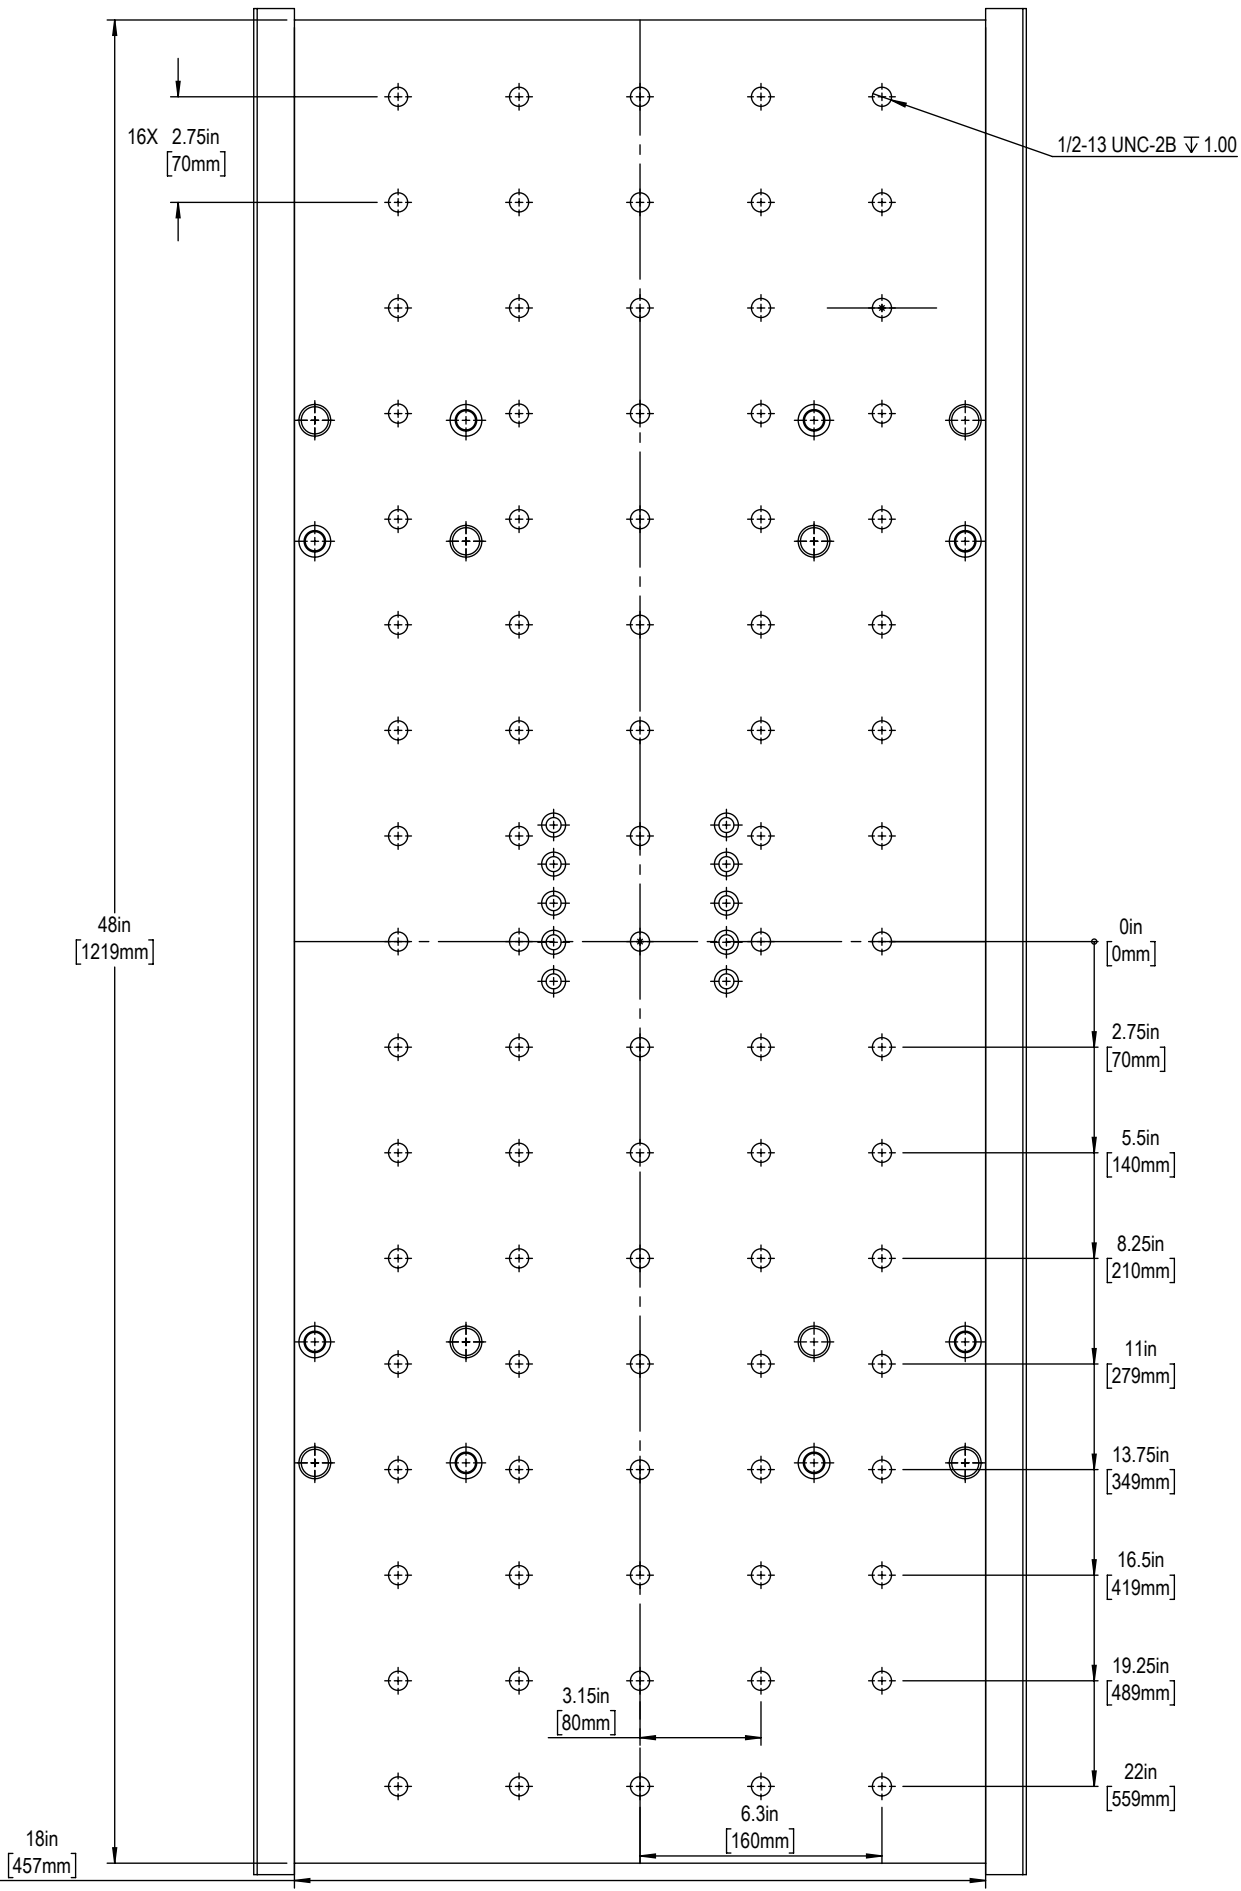



4 X 3.937 = 15.748in
[400mm]
NON-CUMULATIVE

M12 X 1.75 ∇ 1.00

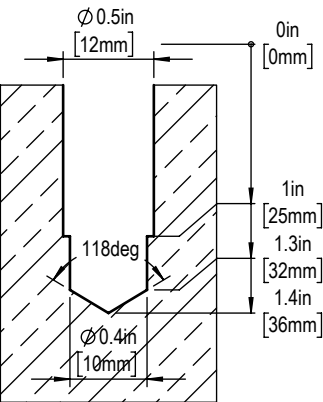

SECTION I-I

10 X 3.937 = 39.37in
[1000mm]
NON-CUMULATIVE

